




### Technical information:


|   |               |
|---|---------------|
| Brand                                     | MEANWELL      |
| Reference number                          | XLG-25        |
| IP  | 67            |
| Power output                              | 25W           |
| Nominal DC output voltage<br>(under load) | 22-54V        |
| Nominal output current                    | 500mA         |
| Input voltage range                       | 90-305V       |
| Frequency                                 | 47/63Hz       |
| Power factor ( $\lambda$ )                | 0,95          |
| Circuit breaker                           | 3 - 5 - 5 - 8 |
| Specifications                            | On-Off        |

### Dimension

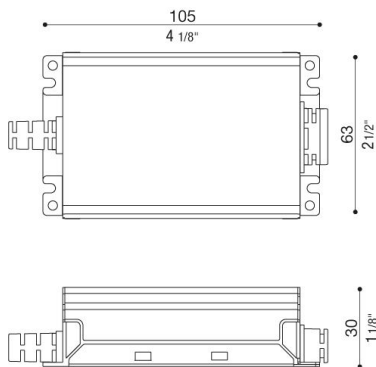

### LED Controlgear Constant Current

Series connection



### Warning!!!

Before connecting the ballast to the mains, ensure that the LEDs on the secondary are connected. Otherwise the lamp may not switch on.

