


# Dodo 100

## LL14303D2


# Lombardo.



### Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	E
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	8
Lumen:	1180
Real Lumen:	350
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	45-56-66-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 54</b>
Resistance to breakage:	<b>IK 10 20J xx9</b>
Standards and Marks of Conformity:	CE UK EA


Available light beams: 30°, 45°, 60°, 75°, 90°, adjustable with fins.



**Dodo 100**

LL14303D2


**Lombardo.**

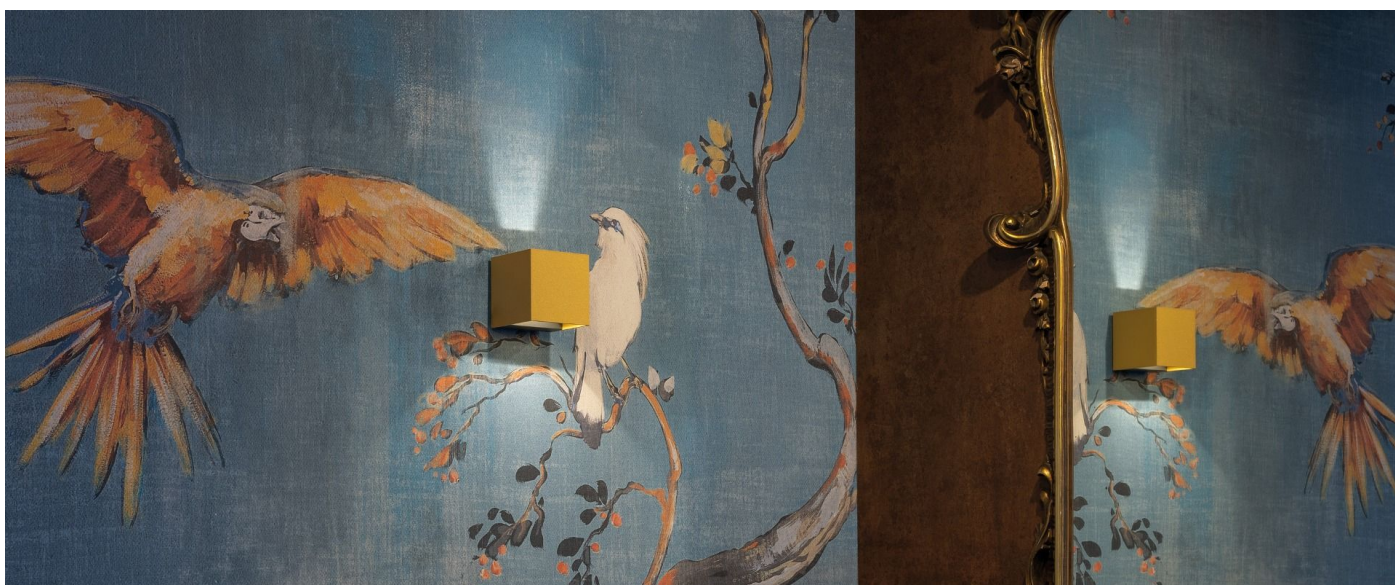


**Installation images:**




### Lighting simulation:

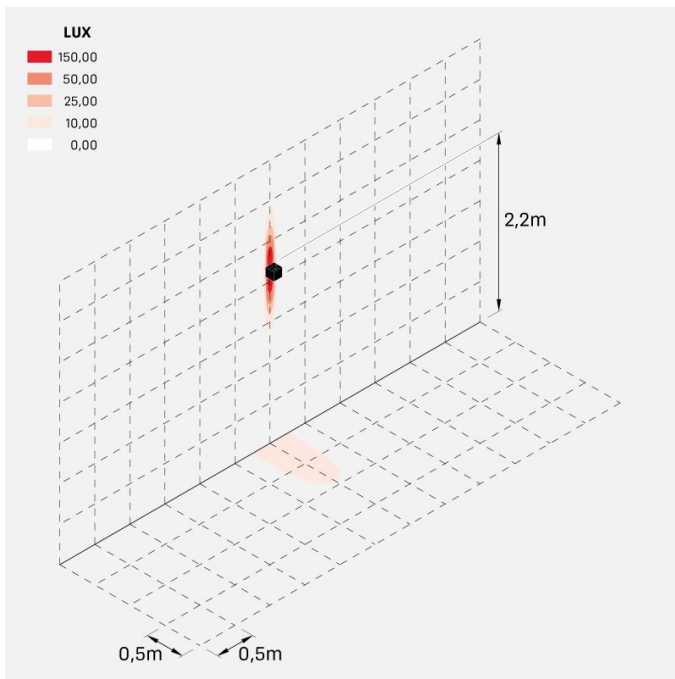


dodo\_100\_30

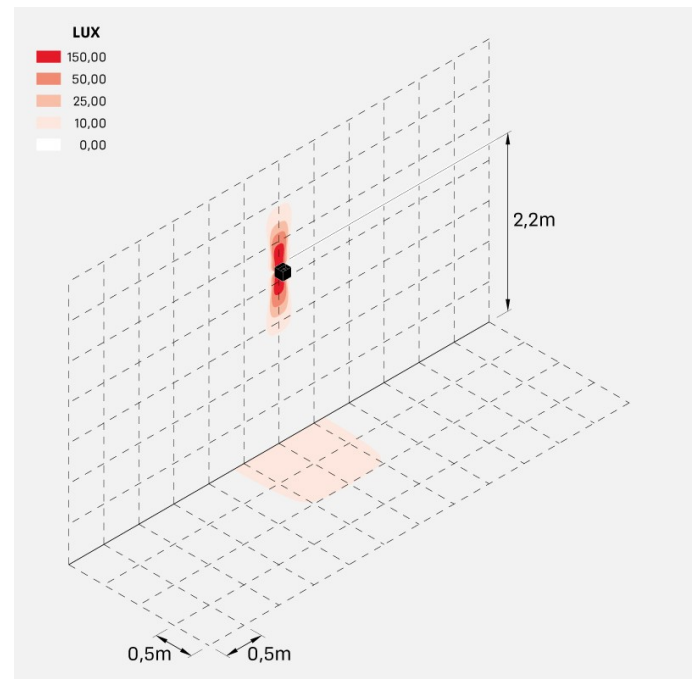

dodo\_100\_45

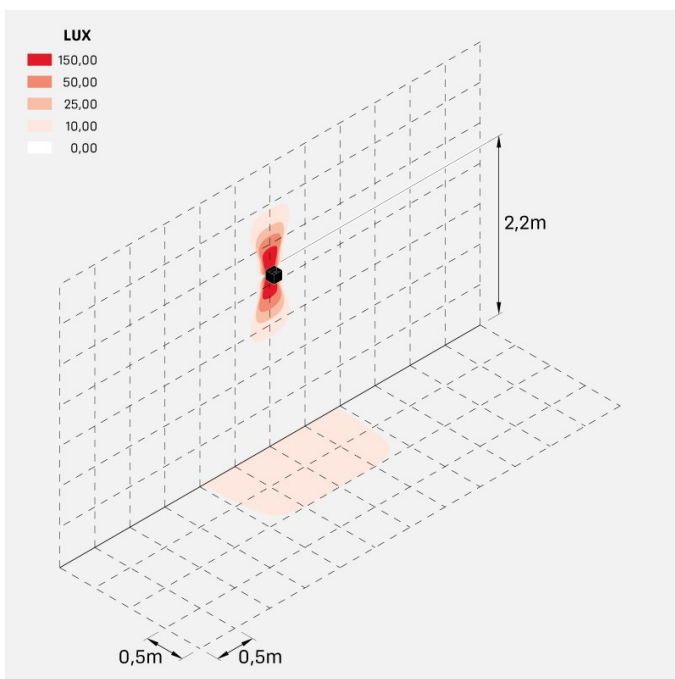


dodo\_100\_60

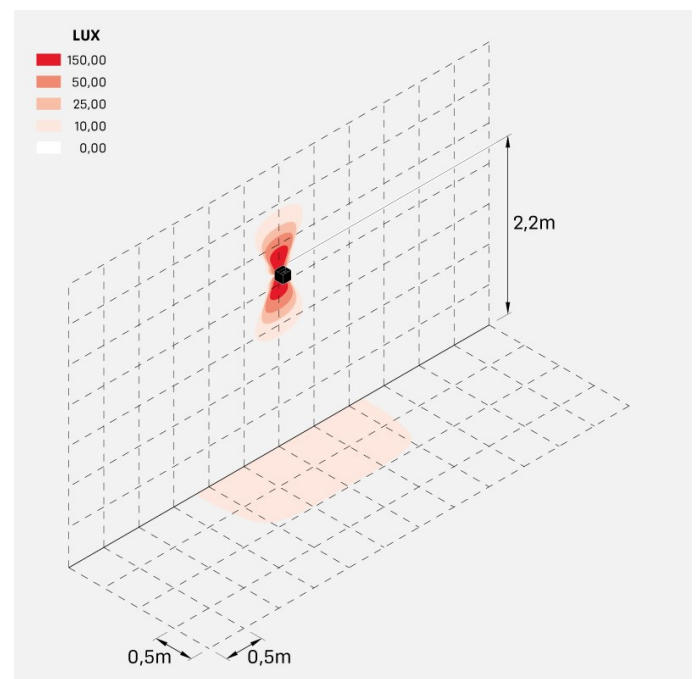




dodo\_100\_75

LL14303D2

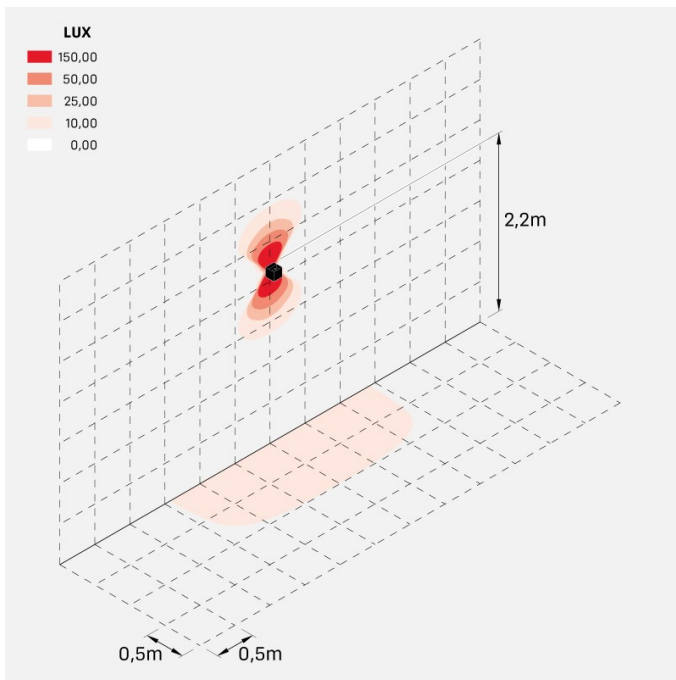

dodo\_100\_90

## Photometric curves:

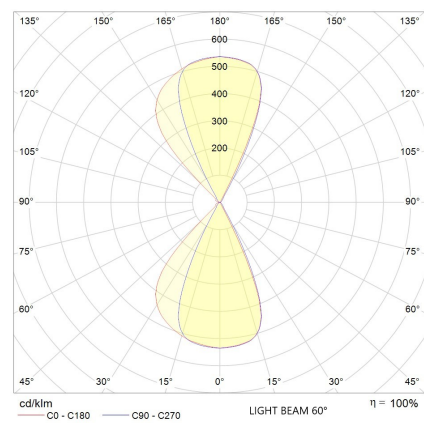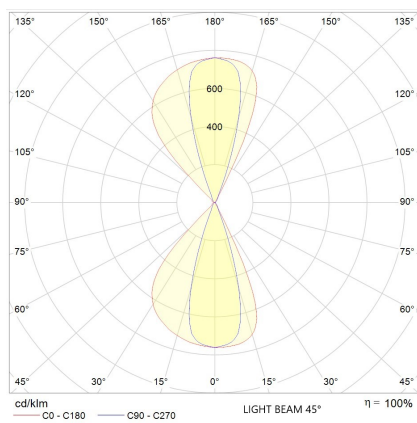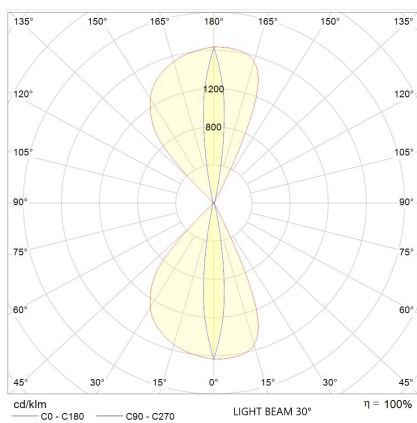

# Dodo 100

## LL14303D2

# Lombardo.

