


Dodo 300

LL14305D2


Lombardo.



Technical information:

| | |
|------------------------------------|----------------------|
| Installation: | Wall |
| Material: | Aluminium |
| Finish: | Dark Grey RAL 7021 |
| Treatment: | Sea Treatment |
| Diffuser type: | Polycarbonate |
| Lamp type: | LED |
| Energy performance class: | E |
| Colour temperature: | 2700K |
| CRI: | >80 |
| LB Factor: | L80B20 - 50.000h |
| Photobiological risk: | RG0 |
| Power consumption (Watt): | 20 |
| Lumen: | 2900 |
| Real Lumen: | 1220 |
| Power supply: | ✓ integrated |
| LED: | 220-240 V |
| Circuit breaker | 30-38-45-57 |
| B10 - C10 - B16 - C16 | |
| Insulation class: | ⊕ CL.I |
| Type of protection: | IP 54 |
| Resistance to breakage: | IK 10 20J xx9 |
| Standards and Marks of Conformity: | CE UK EA |

Adjustable light beam angle.



Dodo 300

LL14305D2


Lombardo.




Installation images:



Lighting simulation:

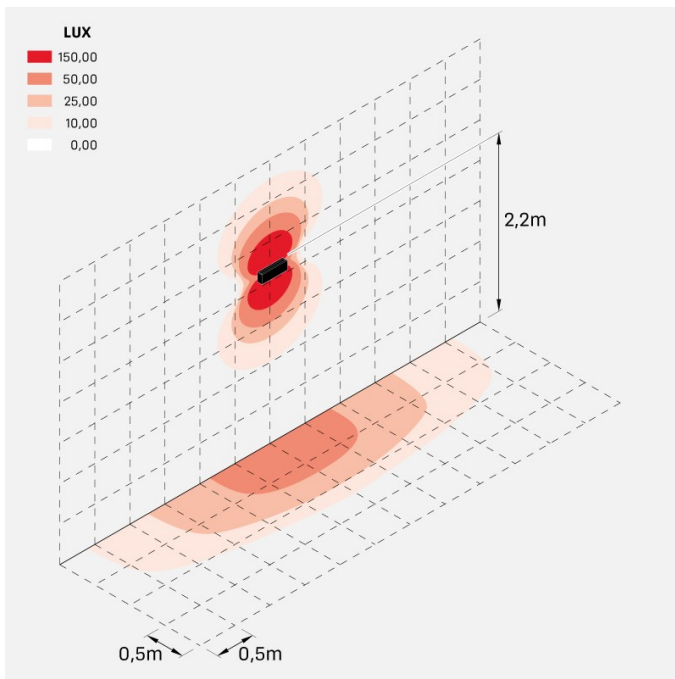

dodo_300_open

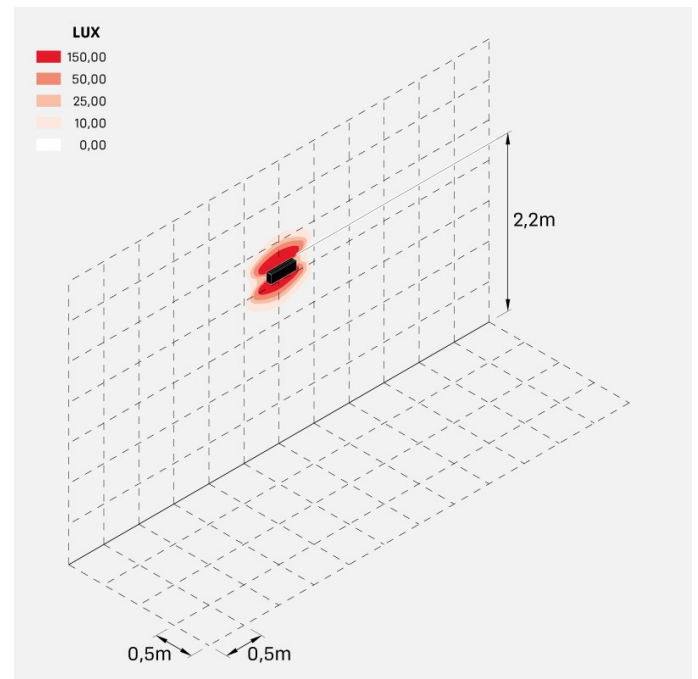

dodo_300_close

Photometric curves:

