


Flo Q 150

LL1340003

Lombardo.



Technical information:

Installation:	Wall, Ceiling
Material:	Aluminium
Finish:	White RAL 9003
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	10
Lumen:	900
Real Lumen:	481
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	36-44-52-65
B10 - C10 - B16 - C16	
Insulation class:	⊖ CL.I
Type of protection:	IP 20
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA



Flo Q 150

LL1340003

Lombardo.



Installation images:




Flo Q 150

LL1340003

Lombardo.

Lighting simulation:

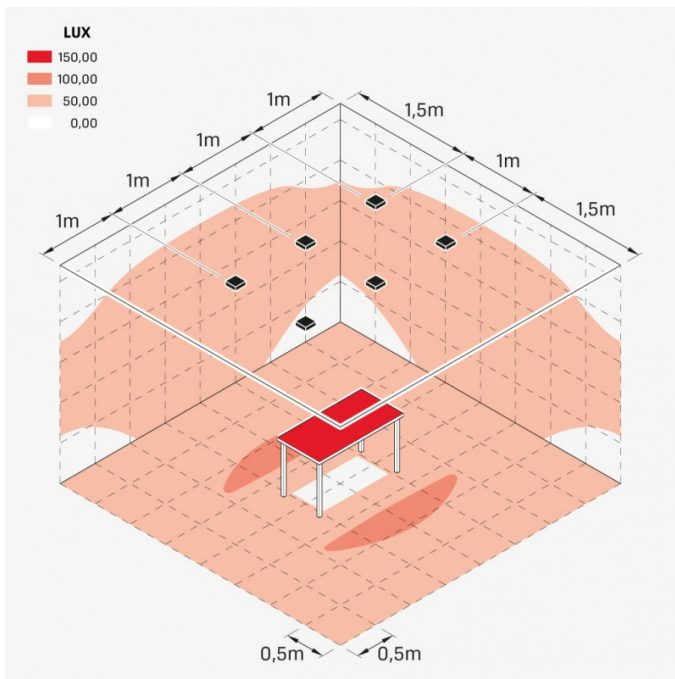

flo_q_150

Photometric curves:

