

.....

INC

.....

↳ INC 35

↳ INC 50

INC

Installazione

Installation
Installation
Instalación

Incasso parete - Incasso soffitto - Incasso terra

Wall recess - Ceiling recess - Ground recess
Encastrement au mur - Encastrement au plafond - Encastrement au sol
Empotrar pared - Empotrar techo - Empotrar suelo

Materiali

Materials
Materiali
Materiales

Materiale Corpo: Alluminio | Tipo di diffusore: Vetro

Material: Aluminium | Diffuser type: Glass
Matériel du corps: Aluminium | Type de diffuseur: Verre
Material del cuerpo: Aluminio | Tipo de difusor: Cristal

Alimentazione

Power supply
Alimentation
Alimentación

500mA - 4,8V - 12/24V - 500mA - 14V - 24V

Versioni

Versions
Versions
Versiones

Cavo Alimentazione: 1,50 metri H05RN-F 2×0,75

Power cable: 1.50 m H05RN-F 2×0.75
Câble d'alimentation: 1,50 m H05RN-F 2×0,75
Cable de alimentación: 1,50 m H05RN-F 2×0,75



INC
35



INC
50



COLOURS



Satin grey



Grey anthracite RAL 7021



White RAL 9010

INC 35

IP 67 IK 10 20J xx9 CE UK CR 500 KG MAX 65°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	2	180	120	⊠ ⊗ 500mA-4,8V	LL132000□□ LL132002□□ LL132001□□	
	2	180	120	⊠ ⊗ 12/24V	LL132003□□ LL132005□□ LL132004□□	

* Complete the CODE ○ OPTIC S | 14° M | 29° L | 46° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

INC 50

IP 67 IK 10 20J xx9 CE UK CR 500 KG MAX 65°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	6,5	650	418	⊠ ⊗ 500mA-14V	LL132006□□ LL132008□□ LL132007□□	
	6,5	650	418	⊠ ⊗ 24V	LL132009□□ LL132011□□ LL132010□□	

* Complete the CODE ○ OPTIC S | 13° M | 24° L | 53° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K



INC 50

Cavo H05RN-F 2x0,75

Cavo H05RN-F in Neoprene, sezione 2x0,75.
Adatto ad uso esterno.

Cable type H05RN-F 2x0,75

Cable type H05RN-F in Neoprene, section 2x0.75.
Suitable for outdoor use.

Câble H05RN-F 2x0,75

Câble H05RN-F en Néoprène, section 2x0,75.
Également adapté à l'usage à l'extérieur.

Cable H05RN-F 2x0,75

Cable H05RN-F de Neopreno, sección 2x0,75.
Adecuado para el uso al exteriores.

Cavo H05RN-F 5m

Col.	Code
	LB1070004

Cavo H05RN-F 10m


Col.	Code
	LB1070005

Cavo H05RN-F 15m

Col.	Code
	LB1070006

Cavo H05RN-F 20m

Col.	Code
	LB1070007



Armatura da incasso INC 35

Armatura da incasso in termoplastico.

Col.	Code
	LB1070001

Thermoplastic recess box INC 35


Thermoplastic recess box.

Armature à encastrer INC 35

Armature à encastrer en matériau thermoplastique.

Caja de empotrar INC 35

Caja de empotrar de material termoplástico.



Armatura da incasso INC 50

Armatura da incasso in termoplastico.

Col.	Code
	LB1070039

Recess box INC 50


Thermoplastic recess box.

Boîte d'encastrement INC 50

Armature à encastrer en matériau thermoplastique.

Caja de empotrar INC 50

Caja de empotrar de material termoplástico.




Alimentatori INC 35 in corrente costante

INC 35 ballasts in constant current


350mA			
N° max	IP	Code	
1/2	20	LB1070008	
1/4	20	LB1070009	
5/10	20	LB1070011	
1/2 1-10V PUSH	20	LB1070012	
2/4	67	LB1070013	
5/10	67	LB1070014	
2/9 DALI	20	LB1070064	

500mA			
N° max	IP	Code	
1/2	20	LB1070015	
1/4	20	LB1070016	
5/10	20	LB1070018	
1/12 1-10V PUSH	20	LB1070019	
1/4	67	LB1070020	
5/10	67	LB1070021	
2/9 DALI	20	LB1070064	
1/7 1-10V PUSH	20	LB1070043	




Alimentatori INC 35 in tensione costante 12/24V

INC 35 ballasts in constant tension 12/24V	12V			24V		
	N° max	IP	Code	N° max	IP	Code
Alimentations INC 35 en tension 12/24V	1/6	20	LB1070025	1/6	20	LB1070029
	1/12	20	LB1070026	1/12	20	LB1070030
Alimentadores INC 35 de tensión constante 12/24V	1/8	67	LB1070027	1/8	67	LB1070031
	1/15	67	LB1070028	1/15	67	LB1070032





Alimentatori INC 50 in corrente costante

INC 50 ballasts in constant current	350mA			500mA		
	N° max	IP	Code	N° max	IP	Code
Alimentations INC 50 en courant constant	1	20	LB1070009	1	20	LB1070016
	1/3	20	LB1070011	1/3	20	LB1070018
Alimentadores INC 50	1/3 1-10V PUSH	20	LB1070012	1/3 1-10V PUSH	20	LB1070019
	1/2	67	LB1070013	1/2	67	LB1070020
	1/3 DALI	20	LB1070064	1/3 DALI	20	LB1070064



Alimentatori INC 50 in tensione costante 24V

INC 50 ballasts in constant tension 24V available	N° max	IP	Code
Alimentations INC 50 en tension 24V	1/2	20	LB1070029
	1/4	20	LB1070031
	1/5	67	LB1070030
Alimentadores INC 50 de tensión constante 24V	1/7	67	LB1070032

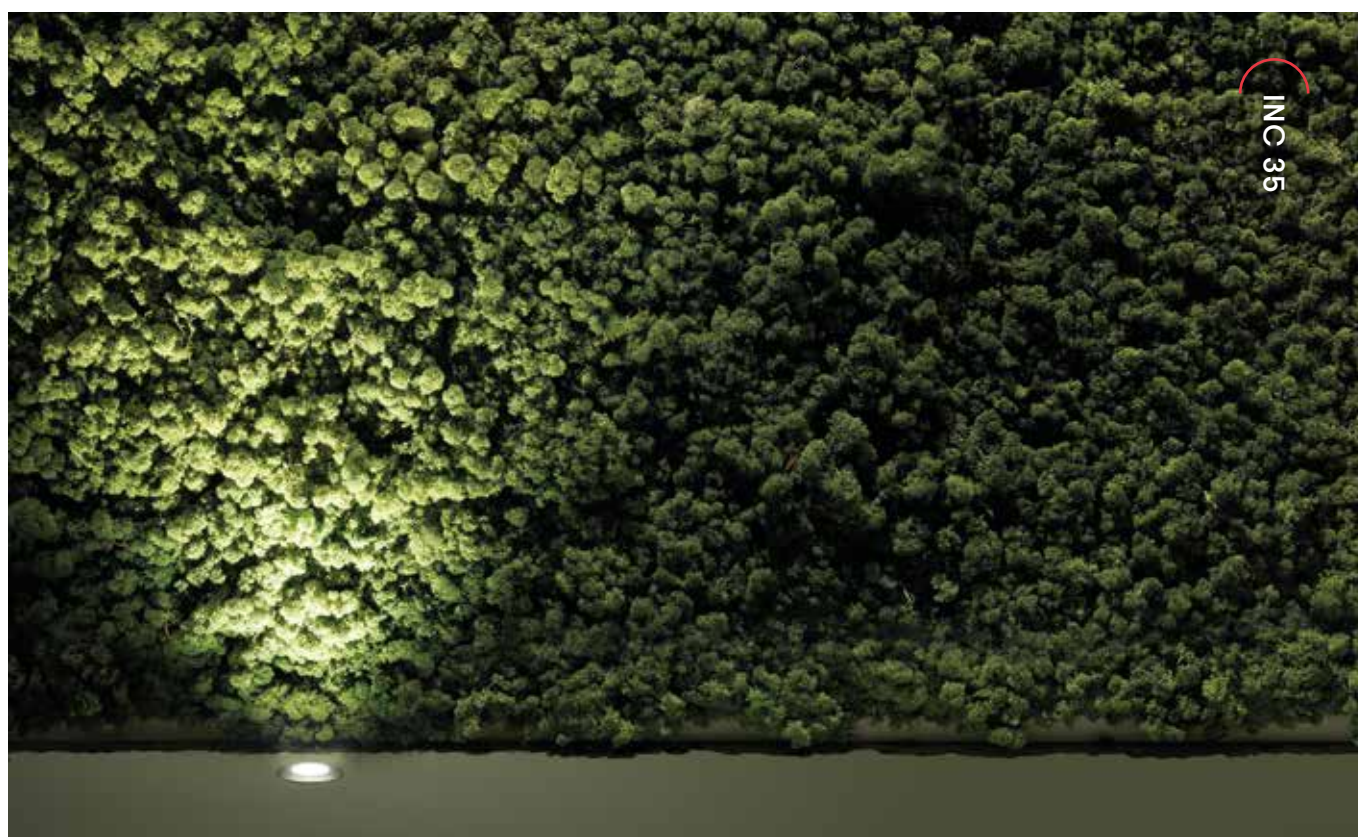



INC 50

INC 35

