

Noa 100 Wall

LL133032M3

Lombardo.



Technical information:

| | |
|------------------------------------|--------------------------|
| Installation: | Wall, Ceiling, Ground |
| Material: | Aluminium |
| Finish: | Grey anthracite RAL 7021 |
| Treatment: | Sea Treatment |
| Diffuser type: | Serigraphed glass |
| Optics: | 40° |
| Lamp type: | LED |
| Energy performance class: | F |
| Colour temperature: | 3000K |
| CRI: | >80 |
| LB Factor: | L80B20 - 50.000h |
| Photobiological risk: | RG0 |
| Power consumption (Watt): | 16 |
| Lumen: | 1750 |
| Real Lumen: | 1200 |
| Power supply: | ✓ integrated |
| LED: | AC DIRECT |
| Insulation class: | ⊕ CL.I |
| Type of protection: | IP 66 |
| Resistance to breakage: | IK 07 2J xx5 |
| Standards and Marks of Conformity: | CE UK EA |
| Dimming | Phase cut |

Optic D not available for Honeycomb version.



Noa 100 Wall

LL133032M3

Lombardo.



Installation images:




Noa 100 Wall

LL133032M3

Lombardo.

Lighting simulation:

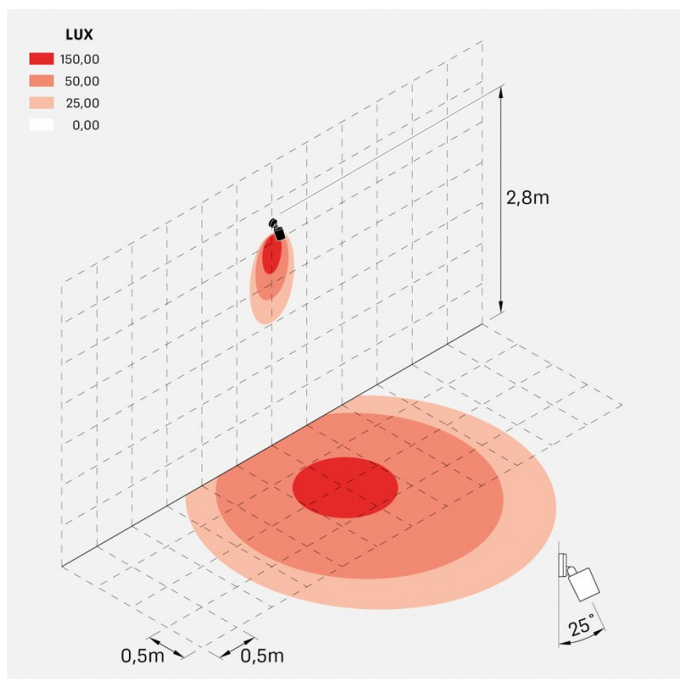

noa_100_wall_optic_m

Photometric curves:

