

# Noa 50 Wall

LL133022M3

**Lombardo.**



## Technical information:

Installation:	Wall, Ceiling, Ground
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Optics:	40°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	9
Lumen:	1000
Real Lumen:	750
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	CE UK ENEC
Dimming	Phase cut

Optic D not available for Honeycomb version.



# Noa 50 Wall

LL133022M3

Lombardo.



## Installation images:




# Noa 50 Wall

LL133022M3

Lombardo.

## Lighting simulation:

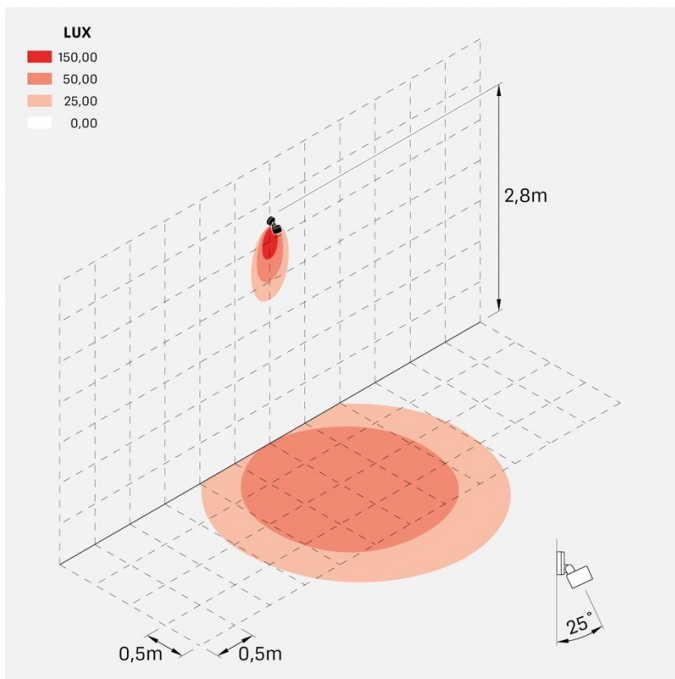

noa\_50\_wall\_optic\_m

## Photometric curves:

