



RNC Slim 1020

LL1381032

Lombardo.

Technical information:



Installation:	Ground recess
Material:	PMMA
Diffuser type:	PMMA
Lamp type:	LED
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	10
Lumen:	1200
Real Lumen:	280
Power supply:	⊗ not included
LED:	24V
Insulation class:	⊖ CL.III
Power cable:	1 m H05RN-F
Type of protection:	IP 67
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA
Additional features:	⬇Ⓞ 2000 ^{KG} _{MAX} ^{III} ₄ 35°C _{MAX}



RNC Slim 1020


LL1381032

Lombardo.

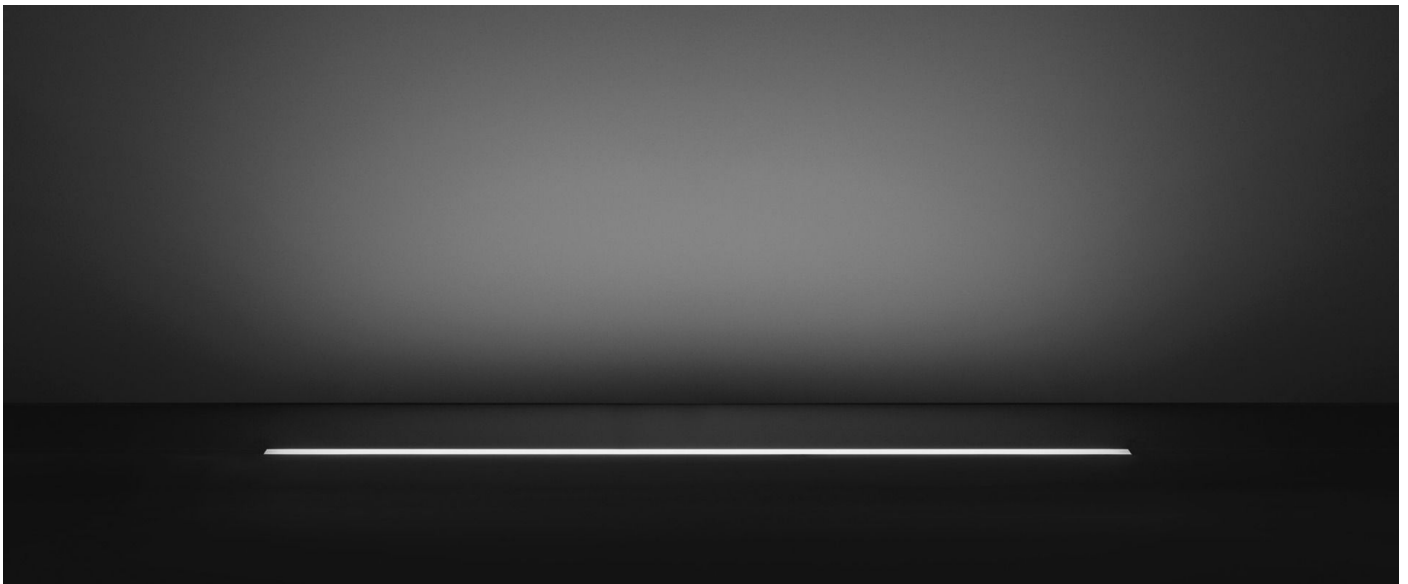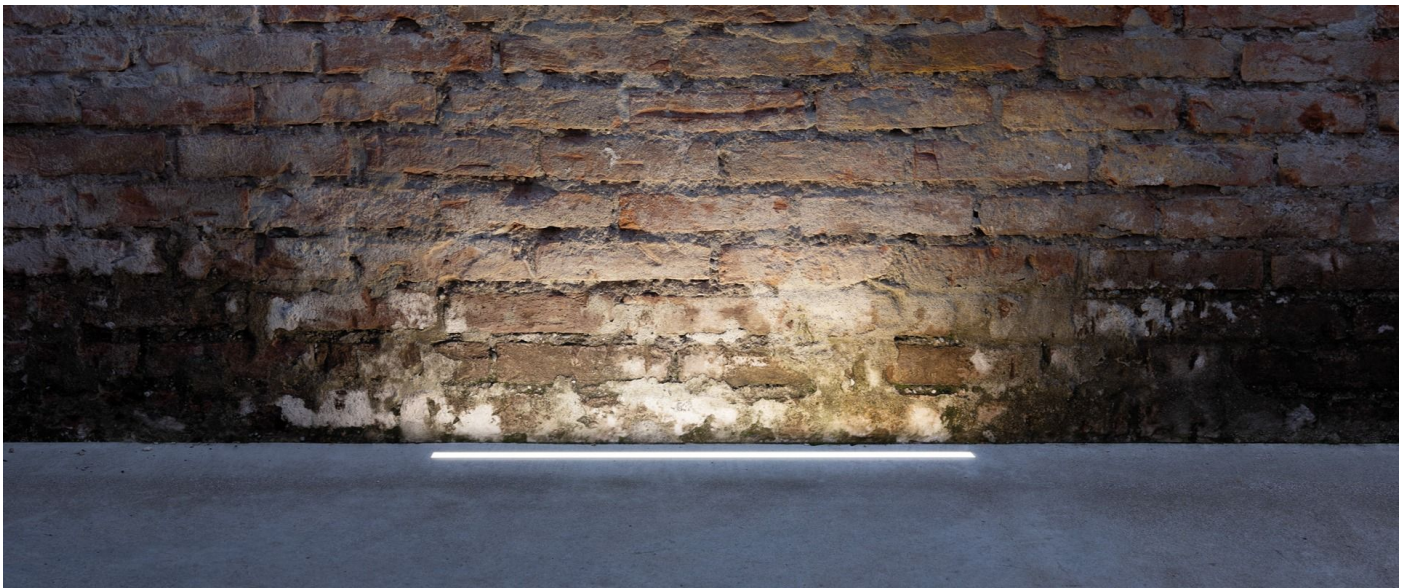

LL1381032

Lighting simulation:

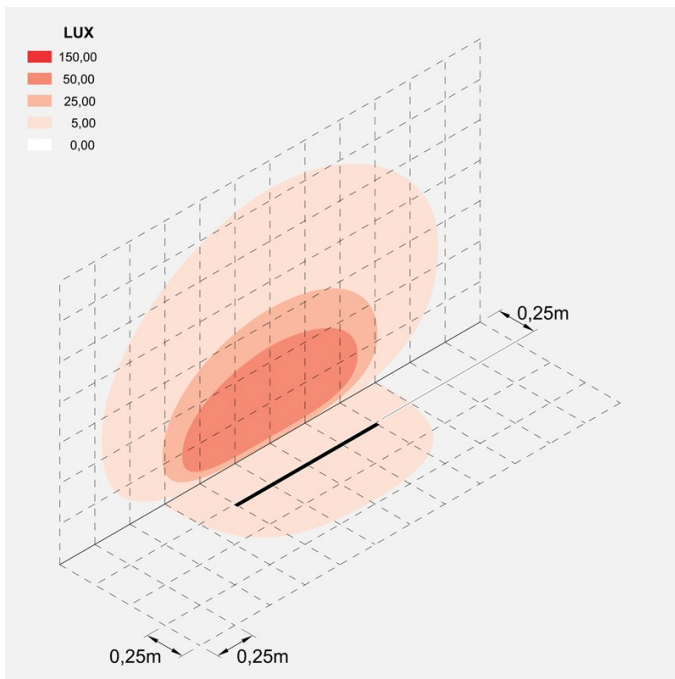

rnc_slim_1020

Photometric curves:

