



# RNC Slim 520

LL1381012

**Lombardo.**



## Technical information:



Installation:	Ground recess
Material:	PMMA
Diffuser type:	PMMA
Lamp type:	LED
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	5
Lumen:	600
Real Lumen:	125
Power supply:	⊗ not included
LED:	24V
Insulation class:	⊖ CL.III
Power cable:	1 m H05RN-F
Type of protection:	<b>IP 67</b>
Resistance to breakage:	<b>IK 10 20J xx9</b>
Standards and Marks of Conformity:	CE UK CA
Additional features:	⬇Ⓞ <b>2000</b> <sup>KG</sup> <sub>MAX</sub> <sup>III</sup> <sub>4</sub> <b>35°C</b> <sub>MAX</sub>



**RNC Slim 520**


LL1381012

**Lombardo.**

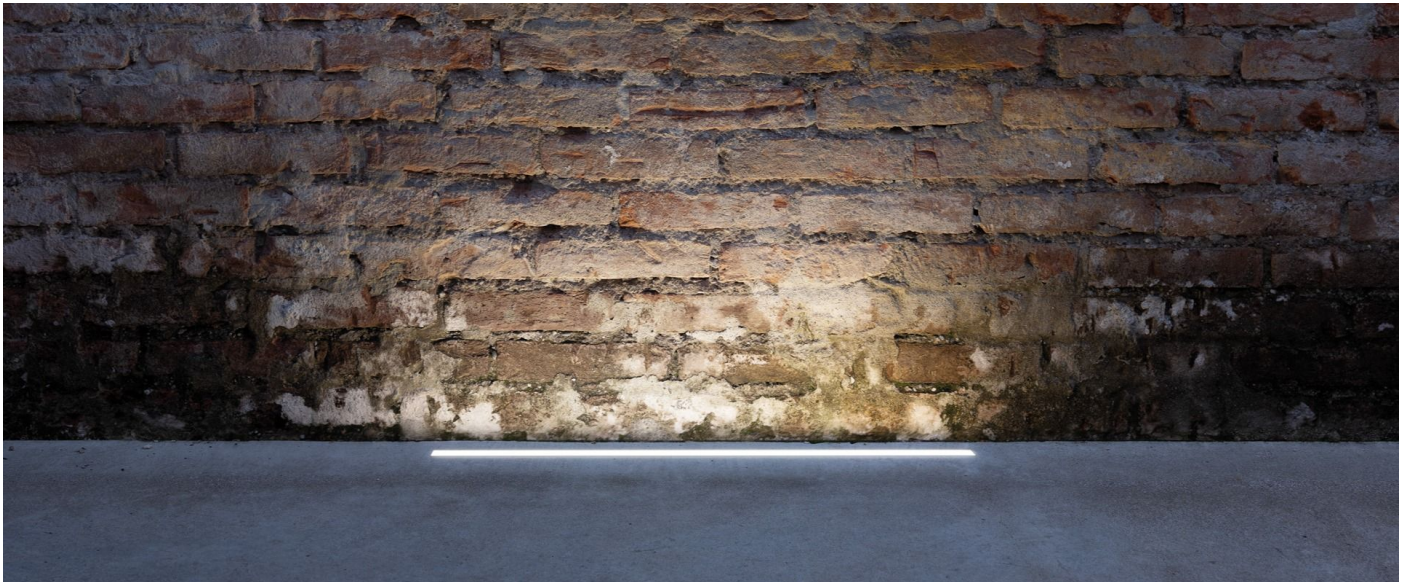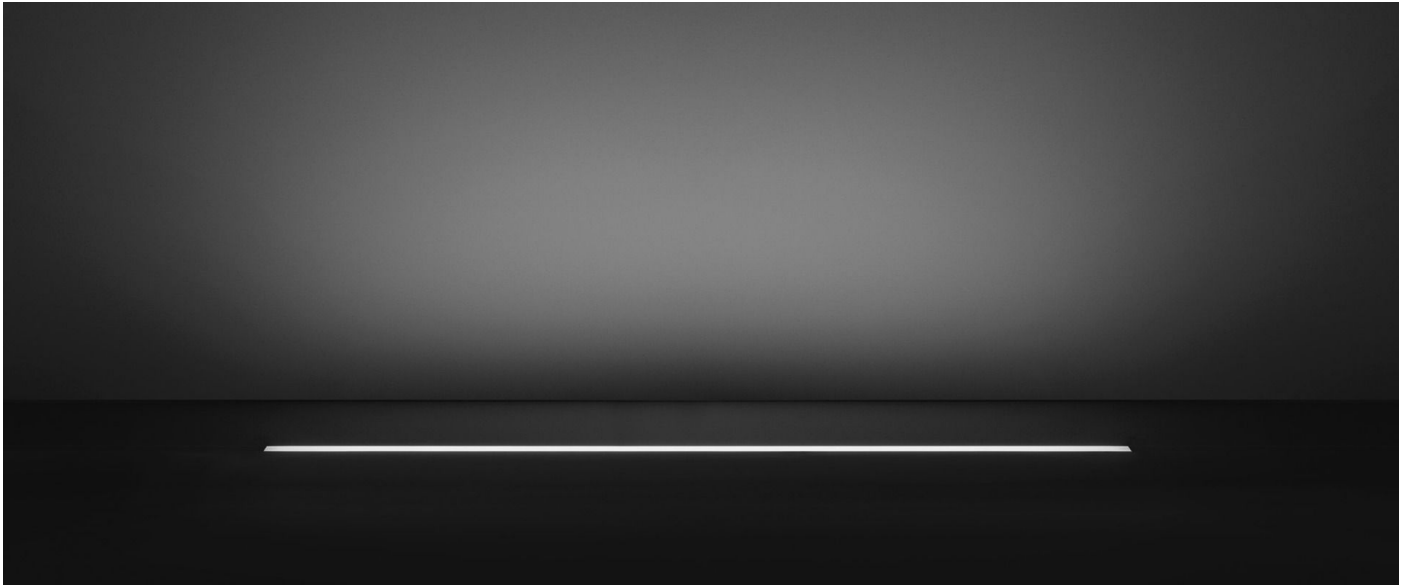

LL1381012

## Lighting simulation:

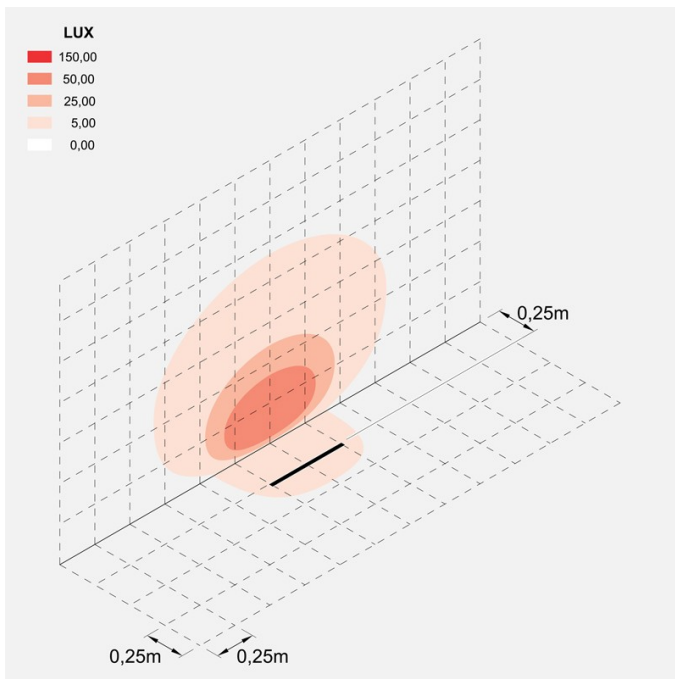

rnc\_slim\_520

## Photometric curves:

