


RNC Slim 770

LL1381022

Lombardo.



Technical information:



| | |
|------------------------------------|--|
| Installation: | Ground recess |
| Material: | PMMA |
| Diffuser type: | PMMA |
| Lamp type: | LED |
| Colour temperature: | 2700K |
| CRI: | >80 |
| LB Factor: | L80B20 - 50.000h |
| Photobiological risk: | RG0 |
| Power consumption (Watt): | 7,5 |
| Lumen: | 900 |
| Real Lumen: | 200 |
| Power supply: | ⊗ not included |
| LED: | 24V |
| Insulation class: | ⊖ CL.III |
| Power cable: | 1 m H05RN-F |
| Type of protection: | IP 67 |
| Resistance to breakage: | IK 10 20J xx9 |
| Standards and Marks of Conformity: | CE UK CA |
| Additional features: | ⬇Ⓞ 2000 ^{KG} _{MAX} ^{III} ₄ 35°C _{MAX} |



RNC Slim 770


LL1381022

Lombardo.

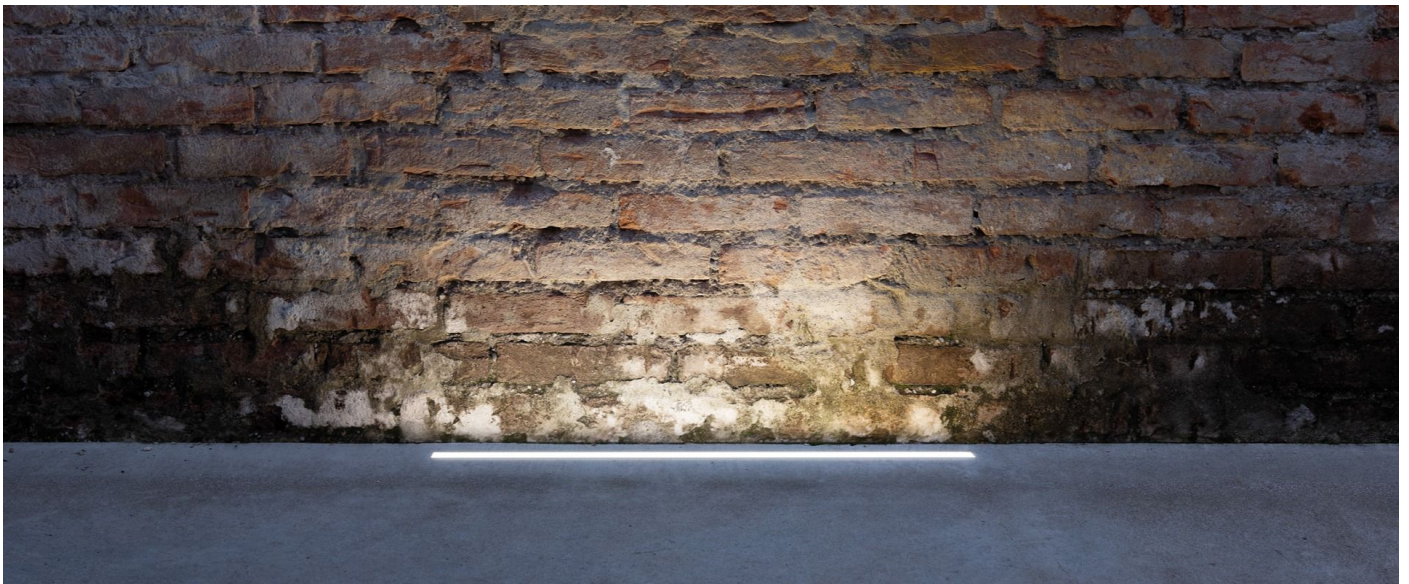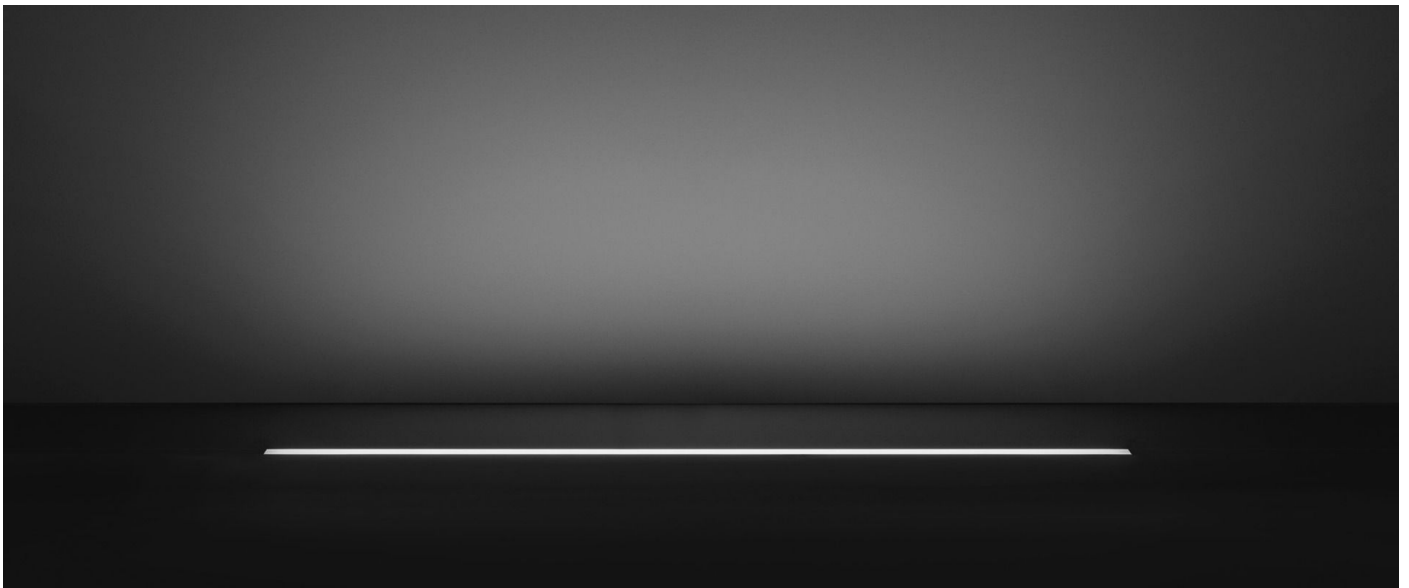

LL1381022

Lighting simulation:

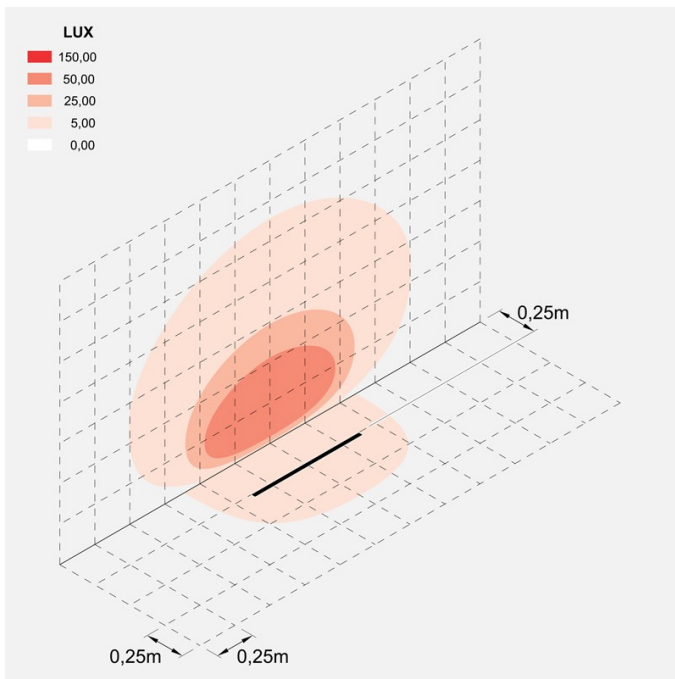

rnc_slim_770

Photometric curves:

