


Tape 80

LL14501D2

Lombardo.



Technical information:

| | |
|------------------------------------|---------------------|
| Installation: | Wall |
| Material: | Aluminium |
| Finish: | Dark Grey RAL 7021 |
| Treatment: | Sea Treatment |
| Diffuser type: | Frosted glass |
| Lamp type: | LED |
| Energy performance class: | E |
| Colour temperature: | 2700K |
| CRI: | >80 |
| LB Factor: | L80B20 - 50.000h |
| Photobiological risk: | RG0 |
| Power consumption (Watt): | 2 |
| Lumen: | 290 |
| Real Lumen: | 248 |
| Power supply: | ⊗ not included |
| LED: | 24V |
| Insulation class: | ⊓ CL.III |
| Type of protection: | IP 66 |
| Resistance to breakage: | IK 06 1J xx3 |
| Standards and Marks of Conformity: | CE UK ER |

Codes LL14512: Kit consisting of Tape 80 + LB1070068 (driver IP66)
Codes LL14522: Kit consisting of Tape 80 + recess box 502 LB1250001 + LB1070068 (driver IP66)



Tape 80

LL14501D2

Lombardo.



Installation images:




Tape 80

LL14501D2

Lombardo.

Lighting simulation:

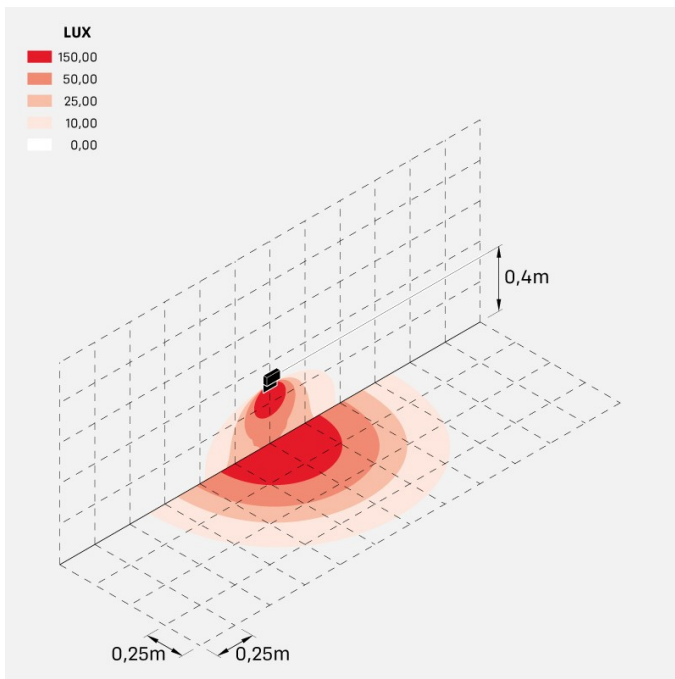

tape_80

Photometric curves:

