



















## Tok C 270 H400

<b>IP66</b> <b>IK 10 20J xx9</b>  	LED			 <b>220-240 V</b> <th rowspan="2">COL.</th> <th rowspan="2">CODE *</th> <td rowspan="2">  </td>	COL.	CODE *	
	W	LM	REAL LM				
	9	930	240		 LL128064 <input type="checkbox"/>  LL128065 <input type="checkbox"/>  LL128066 <input type="checkbox"/>  LL128067 <input type="checkbox"/>		

\* Complete the CODE  LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Fascio luminoso: 270° | Light beam: 270° | Faisceau lumineux : 270° | Haz de luz: 270°




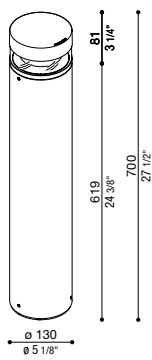
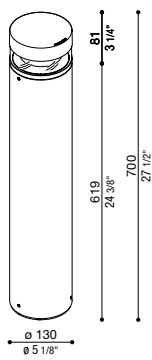




## Tok C H400

<b>IP66</b> <b>IK 10 20J xx9</b>  	LED			 <b>220-240 V</b> <th rowspan="2">COL.</th> <th rowspan="2">CODE *</th> <td rowspan="2">  </td>	COL.	CODE *	
	W	LM	REAL LM				
	8	930	200		 LL128033 <input type="checkbox"/>  LL128006 <input type="checkbox"/>  LL128007 <input type="checkbox"/>  LL128008 <input type="checkbox"/>		

\* Complete the CODE  LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K




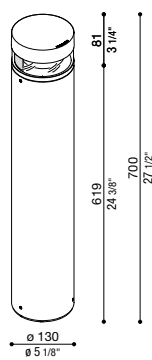
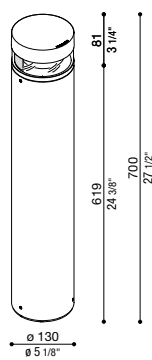




Fascio luminoso: 180° | Light beam: 180° | Faisceau lumineux : 180° | Haz de luz: 180°

## Tok H700

<b>IP66</b> <b>IK 10 20J xx9</b>  	LED			 <b>220-240 V</b> <th rowspan="2">COL.</th> <th rowspan="2">CODE *</th> <td rowspan="2">  </td>	COL.	CODE *	
	W	LM	REAL LM				
	14	1860	650		 LL128018 <input type="checkbox"/>  LL128015 <input type="checkbox"/>  LL128016 <input type="checkbox"/>  LL128017 <input type="checkbox"/>		

\* Complete the CODE  LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

## Tok C 270 H700

<b>IP66</b> <b>IK 10 20J xx9</b>  	LED			 <b>220-240 V</b> <th rowspan="2">COL.</th> <th rowspan="2">CODE *</th> <td rowspan="2">  </td>	COL.	CODE *	
	W	LM	REAL LM				
	9	930	240		 LL128068 <input type="checkbox"/>  LL128069 <input type="checkbox"/>  LL128070 <input type="checkbox"/>  LL128071 <input type="checkbox"/>		

\* Complete the CODE  LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Fascio luminoso: 270° | Light beam: 270° | Faisceau lumineux : 270° | Haz de luz: 270°