



NOVA / CLASS



- ↘ Nova tonda 260
- ↘ Class tonda 330
- ↘ Class tonda 260

NOVA

Installazione

Installation
Installation
Instalación

Parete - Soffitto

Wall - Ceiling
Mur - Plafond
Pared - Techo

Materiali

Materials
Materiali
Materiales

Tipo di diffusore: Vetro acidato

Diffuser type: Etched glass
Type de diffuseur: Verre acidé
Tipo de difusor: Cristal tratado al ácido

Alimentazione

Power supply
Alimentation
Alimentación

220-240 V - lampadina E27 (non inclusa)

220-240 V - E27 light bulb (not included)
220-240 V - ampoule E27 (pas inclus)
220-240 V - bombilla E27 (no incluida)

Versioni

Versions
Versions
Versiones

Rilevatore di presenza - Rete più emergenza 3 ore

Motion sensor - Maintained emergency 3h
Détecteur - Réseau + secours 3 h
Sensor de movimiento - Emergencia + luz continua 3 horas



NOVA
TONDA 260



COLOURS



White




Black



Grey High Tech RAL 9006

Nova Tonda 260

IP44 IK 06 1J xx3 CE UK ER	LED			COL.	CODE *
	W	LM	REAL LM		
Fino ad esaurimento. Until our stock lasts. Jusqu'à épuisement de stock. Hasta el agotamiento del stock.	18	1950	1515	☐ ✓ 220-240 V	<input type="checkbox"/> LL802P1☐ <input checked="" type="checkbox"/> LL802P2☐ <input type="checkbox"/> LL802PG☐
	18	1950	1515	☐ ✓ 220-240 V (☉)	<input type="checkbox"/> LS802P1☐ <input checked="" type="checkbox"/> LS802P2☐ <input type="checkbox"/> LS802PG☐
	18	1950	1515 + LED Em. 3H - 180 lm	☐ ✓ 220-240 V (3h)	<input type="checkbox"/> LL802R1☐ <input checked="" type="checkbox"/> LL802R2☐ <input type="checkbox"/> LL802RG☐
	LAMP			ATT. MAX	CFL
	E27	1x75	1x15	☐ (☉) NOT REC.	<input type="checkbox"/> LB80221 <input checked="" type="checkbox"/> LB80222 <input type="checkbox"/> LB8022G



* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K

Diffusore in vetro acidato. Lampade dim. max: E27 128 mm Ø 48 mm. | Acid-etched glass diffuser. Lamp max. dim: E27 128 mm Ø 48 mm. | Diffuseur en verre acidé. Lampes dim. max: E27 128 mm Ø 48. | Difusor de vidrio acidado. Dim. máx. lámparas: E27 128 mm Ø 48 mm

Accessori | Accessories | Accessoires | Accesorios

Sensore di Movimento

Kit di montaggio per sensore di movimento crepuscolare.

Motion sensor

Mounting kit for motion sensor (which may be mounted inside the fixture).


Détecteur de présence

Kit de montage pour détecteur de mouvement crépusculaire.

Sensor de Movimiento

Kit de montaje para sensor de movimiento crepuscular.

Col. Code
| LB11295



CLASS

Installazione

Installation
Installation
Instalación

Parete - Soffitto

Wall - Ceiling
Mur - Plafond
Pared - Techo

Materiali

Materials
Materiali
Materiales

Tipo di diffusore: Policarbonato

Diffuser type: Polycarbonate
Type de diffuseur: Polycarbonate
Tipo de difusor: Policarbonato

Alimentazione

Power supply
Alimentation
Alimentación

220-240 V - lampadina E27 (non inclusa)

220-240 V - E27 light bulb (not included)
220-240 V - ampoule E27 (pas inclus)
220-240 V - bombilla E27 (no incluida)

Versioni

Versions
Versions
Versiones

Accensioni separate - Rete più emergenza 3 ore - Rilevatore di presenza

Double switching - Maintained emergency 3h - Motion sensor
Allumages séparés - Réseau + secours 3 h - Détecteur
Encendido separado - Emergencia + luz continua 3 horas - Sensor de movimiento



CLASS
TONDA 330



CLASS
TONDA 260



COLOURS



White




















Black



Grey High Tech RAL 9006

Class Tonda 330













IP65 IK 10 20J xx9 CE UK CA	LED			COL.	OPAL.	SEMITRASP.
	W	LM	REAL LM		CODE *	CODE *
	18	1950	1256-1701	☐ ✓ 220-240 V	 LL581Q1☐	LL582Q1☐
					 LL581Q2☐	LL582Q2☐
					 LL581QG☐	LL582QG☐
	18	1950	1256	☐ ✓ 220-240 V (☉)	 LS581Q1☐	
					 LS581Q2☐	
					 LS581QG☐	
	18	1950	1256-1701 + LED Em. 3H - 180 lm	☐ ✓ 220-240 V (☉) 3h	 LL581B1☐	LL582B1☐
					 LL581B2☐	LL582B2☐
					 LL581BG☐	LL582BG☐
LAMP						
ATT. MAX CFL						
E27	1x100	1x33	☐ (☉) NOT REC.	 LB58121	LB58221	
				 LB58122	LB58222	
				 LB5812G	LB5822G	
E27	2x60	2x30	☐ 	 LB581M1	LB582M1	
				 LB581M2	LB582M2	
				 LB581MG	LB582MG	




* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K

Diffusore in policarbonato. Guarnizione in silicone. Lampade dim. max: E27 196 mm Ø 58 mm. Versione doppia: lampade dim. max: E27 180 mm Ø 58 mm. | Polycarbonate diffuser. Silicone gasket. Lamp max. dim: E27 196 mm Ø 58 mm. Double version: Lamp max. dim: E27 180 mm Ø 58 mm. | Diffuseur en polycarbonate. Joint en silicone. Lampes dim. max: E27 196 mm Ø 58 mm. Version double - Lampes dim. max: E27 180 mm Ø 58 mm. | Difusor de policarbonato. Junta de silicona. Dim. máx. lámparas: E27 196 mm Ø 58 mm. Versión doble - Dim. máx. lámparas: E27 180 mm Ø 58 mm.

Class Tonda 260

IP65 IK 10 20J xx9 CE UK CA	LED			COL.	OPAL.	SEMITRASP.
	W	LM	REAL LM		CODE *	CODE *
	18	1950	1223-1658	☐ ✓ 220-240 V	 LL591P1☐	LL592P1☐
					 LL591P2☐	LL592P2☐
					 LL591PG☐	LL592PG☐
	18	1950	1223	☐ ✓ 220-240 V (☉)	 LS591P1☐	
					 LS591P2☐	
					 LS591PG☐	
	18	1950	1223 + LED Em. 3H - 180 lm	☐ ✓ 220-240 V (☉) 3h	 LL591B1☐	
					 LL591B2☐	
					 LL591BG☐	
LAMP						
ATT. MAX CFL						
E27	1x75	1x15	☐ (☉) NOT REC.	 LB59121	LB59221	
				 LB59122	LB59222	
				 LB5912G	LB5922G	



* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K

Diffusore in policarbonato. Guarnizione in silicone. Lampade dim. max: E27 128 mm Ø 48 mm. | Polycarbonate diffuser. Silicone gasket. Lamp max. dim: E27 128 mm Ø 48 mm. | Diffuseur en polycarbonate. Joint en silicone. Lampes dim. max: E27 128 mm Ø 48 mm. | Difusor de policarbonato. Junta de silicona. Dim. máx. lámparas: E27 128 mm Ø 48 mm.

Sensore di Movimento

Kit di montaggio per sensore di movimento crepuscolare.

Motion sensor

Mounting kit for motion sensor (which may be mounted inside the fixture).

Détecteur de présence


Kit de montage pour détecteur de mouvement crépusculaire.

Sensor de Movimiento

Kit de montaje para sensor de movimiento crepuscular.

Col.	Code
------	------

	LB11295
--	---------



Morsettiera coassiale 3 poli

Morsettiera coassiale a 3 poli, IP68, per cavo ø 7/12 mm.

3-pole coaxial terminal block

3-pole coaxial terminal block, IP68, for cable ø 7/12 mm.

Bornier coaxial à 3 pôles


Bornier coaxial à 3 pôles, IP68, pour câble ø 7/12 mm.

Bloque de terminales coaxiales de 3 polos

Bloque de terminales coaxiales de 3 polos, IP68, para cable ø 7/12 mm.

Col.	Code
------	------

	LB11293
--	---------



Morsettiera lineare a 3 vie

Morsettiera lineare a 3 vie a 3 poli, IP68, per cavo ø 7/13,5 mm.

3 way linear terminal block

3-way 3-pole linear terminal block, IP68, for cable Ø 7/13.5 mm.

Bornier linéaire 3 voies


Bornier linéaire 3 voies à 3 pôles, IP68, pour câble diam. 7/13,5 mm

Caja de bornes lineal de 3 vías


Caja de bornes lineal de 3 vías y de 3 polos, IP68, para cable con ø 7/13,5 mm.

Col.	Code
------	------

	LB11294
--	---------



FEATURES

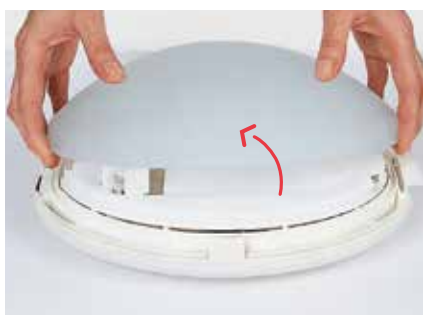

Montaggio e smontaggio senza utensili.

Opening / closing of the diffuser without tools.

Montage et démontage sans outils.

Montaje y desmontaje sin herramientas.

CLASS TONDA 260

