

.....

# TIME

.....

- ↘ Time 180
- ↘ Time 360

# TIME NEW

## Installazione

Installation  
Installation  
Instalación

## Palo Ø60

Post Ø60  
Poteau Ø60  
Poste Ø60

## Materiali

Materials  
Materiali  
Materiales

## Materiale Corpo: Alluminio | Tipo di diffusore: Vetro | Trattamento: Bordo Mare

Material: Aluminium | Diffuser type: Glass | Treatment: Sea Treatment  
Matériel du corps: Aluminium | Type de diffuseur: Verre | Traitement: Bord de Mer  
Material del cuerpo: Aluminio | Tipo de difusor: Cristal | Tratamiento: Tratamiento marino

## Alimentazione

Power supply  
Alimentation  
Alimentación

220-240 V

## Versioni

Versions  
Versions  
Versiones

DALI



180°



**TIME**  
180



360°



**TIME**  
360



**Scopri la gamma**  
Discover the range  
Découvrez la gamme  
Descubre la gama

## COLOURS



Black RAL 9005



Grey High Tech RAL 9006



Grey anthracite RAL 7021




Corten

## Time 180



IP65 IK 08 5J xx7 CE UK ER	LED			COL.	CODE *
	W	LM	REAL LM		
180°	26	2800	2500	☐ ☑ 220-240 V	LL155180B ☐
					LL155180G ☐
					LL155180E ☐
					LL155180K ☐
26	2800	2500	☐ ☑ 220-240 V DALI	LM155180B ☐	
				LM155180G ☐	
				LM155180E ☐	
				LM155180K ☐	
52	6100	4500	☐ ☑ 220-240 V	LL155181B ☐	
				LL155181G ☐	
				LL155181E ☐	
				LL155181K ☐	
52	6100	4500	☐ ☑ 220-240 V DALI	LM155181B ☐	
				LM155181G ☐	
				LM155181E ☐	
				LM155181K ☐	




\* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Consigliata l'installazione su pali metallici Ø60. Non idoneo per pali Still. Cavo versione ON-OFF: 1m H05RN-F 2x1. Cavo versione DALI: 1m H07RN-F 4x1. Recommended for installation on Ø 60 metal poles. Not suitable for Still poles. Cable ON-OFF version: 1m H05RN-F 2x1. Cable DALI version: 1m H07RN-F 4x1. | Recommandé pour l'installation sur des poteaux métalliques de Ø60. Ne convient pas aux Still poteaux. Câble version ON-OFF : 1m H05RN-F 2x1. Câble version DALI : 1m H07RN-F 4x1. | Se recomienda su instalación en postes metálicos de Ø60. No es apto para los postes Still. Cable versión ON-OFF: 1m H05RN-F 2x1. Cable versión DALI: 1m H07RN-F 4x1.

## Time 360



IP65 IK 08 5J xx7 CE UK ER	LED			COL.	CODE *
	W	LM	REAL LM		
360°	52	6100	5400	☐ ☑ 220-240 V	LL155360B ☐
					LL155360G ☐
					LL155360E ☐
					LL155360K ☐
52	6100	5400	☐ ☑ 220-240 V DALI	LM155360B ☐	
				LM155360G ☐	
				LM155360E ☐	
				LM155360K ☐	



\* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Consigliata l'installazione su pali metallici Ø60. Non idoneo per pali Still. Cavo versione ON-OFF: 1m H05RN-F 2x1. Cavo versione DALI: 1m H07RN-F 4x1. Recommended for installation on Ø 60 metal poles. Not suitable for Still poles. Cable ON-OFF version: 1m H05RN-F 2x1. Cable DALI version: 1m H07RN-F 4x1. | Recommandé pour l'installation sur des poteaux métalliques de Ø60. Ne convient pas aux Still poteaux. Câble version ON-OFF : 1m H05RN-F 2x1. Câble version DALI : 1m H07RN-F 4x1. | Se recomienda su instalación en postes metálicos de Ø60. No es apto para los postes Still. Cable versión ON-OFF: 1m H05RN-F 2x1. Cable versión DALI: 1m H07RN-F 4x1.

## Morsettiera coassiale 4 poli

**Morsettiera coassiale a 4 poli, IP68, per cavo  $\varnothing$  7/13,5 mm.**

**4-pole coaxial terminal block**

4-pole coaxial terminal block, IP68, for cable  $\varnothing$  7/13.5 mm.

**Bornier coaxial à 4 pôles**


Bornier coaxial à 3 pôles, IP68, pour câble  $\varnothing$  7/13,5 mm.

**Bloque de terminales coaxiales de 4 polos**

Bloque de terminales coaxiales de 4 polos, IP68, para cable con  $\varnothing$  7/13,5 mm.

**Col.**    **Code**

LB11292



## Morsettiera coassiale 3 poli

**Morsettiera coassiale a 3 poli, IP68, per cavo  $\varnothing$  7/12 mm.**

**3-pole coaxial terminal block**

3-pole coaxial terminal block, IP68, for cable  $\varnothing$  7/12 mm.

**Bornier coaxial à 3 pôles**


Bornier coaxial à 3 pôles, IP68, pour câble  $\varnothing$  7/12 mm.

**Bloque de terminales coaxiales de 3 polos**

Bloque de terminales coaxiales de 3 polos, IP68, para cable  $\varnothing$  7/12 mm.

**Col.**    **Code**

LB11293



↙ **Colori disponibili.**  
Available colours.  
Couleurs disponibles.  
Colores disponibles.




## FEATURES



TIME 360

TIME 180

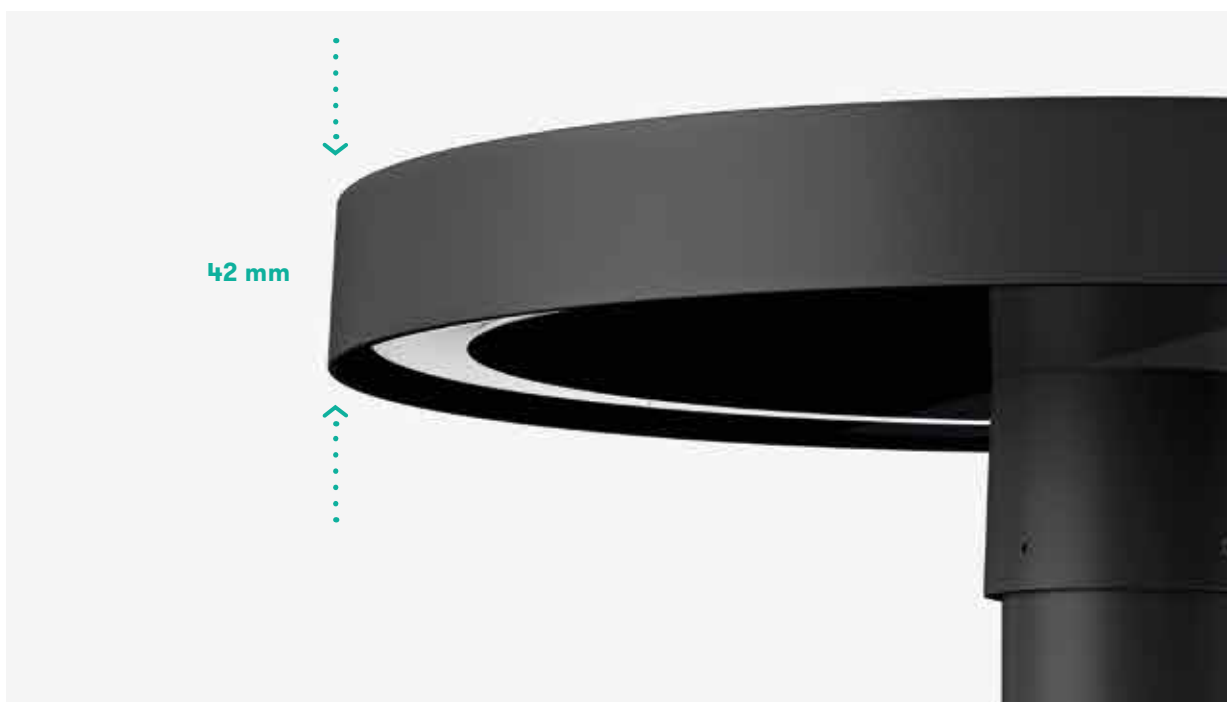

42 mm

**Spessore del diffusore di soli 42 mm.**

Diffuser only 42 mm thick.

Diffuseur de seulement 42 mm d'épaisseur.

Difusor de sólo 42 mm de grosor.





TIME 180





TIME 360






TIME 180





TIME 360

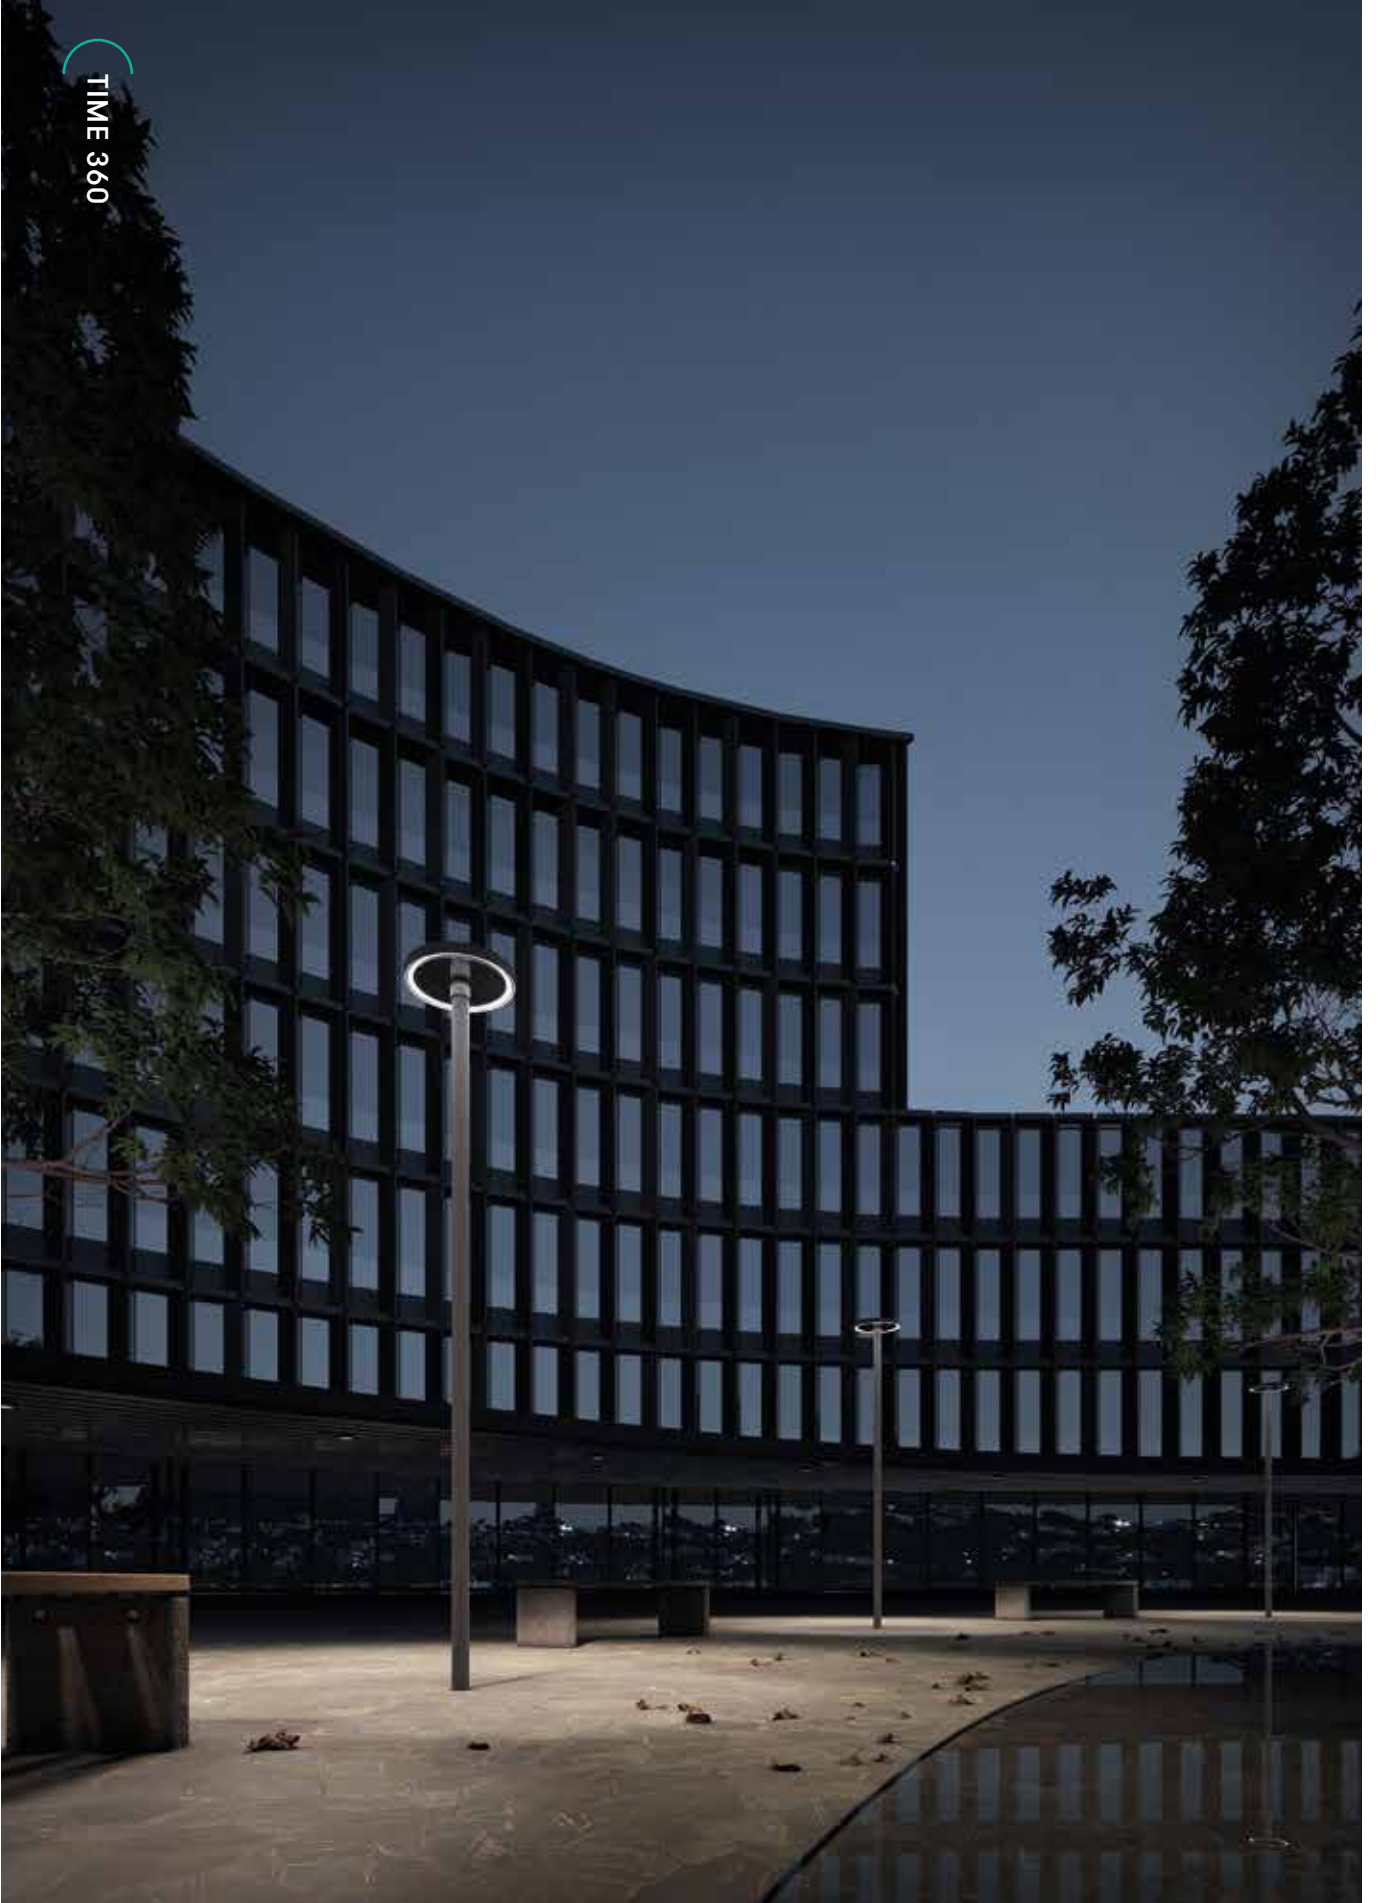




# FEATURES


**Fasci luminosi**  
 Light beams  
 Faisceaux lumineux  
 Haces luminosas

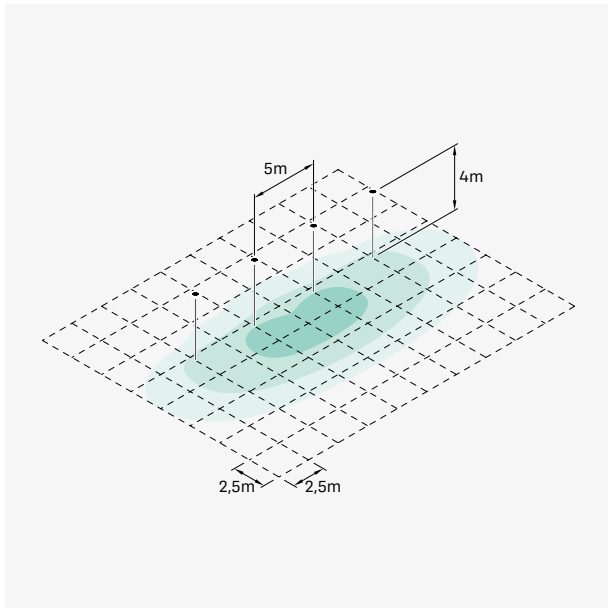

**TIME 180 26W**

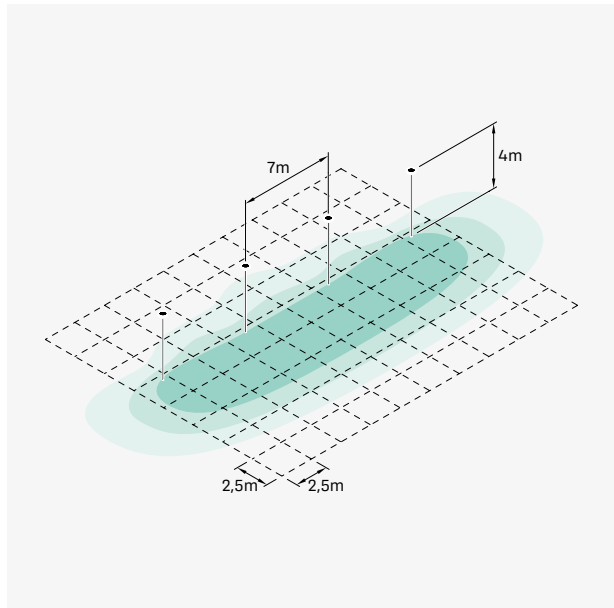

**TIME 180 52W**

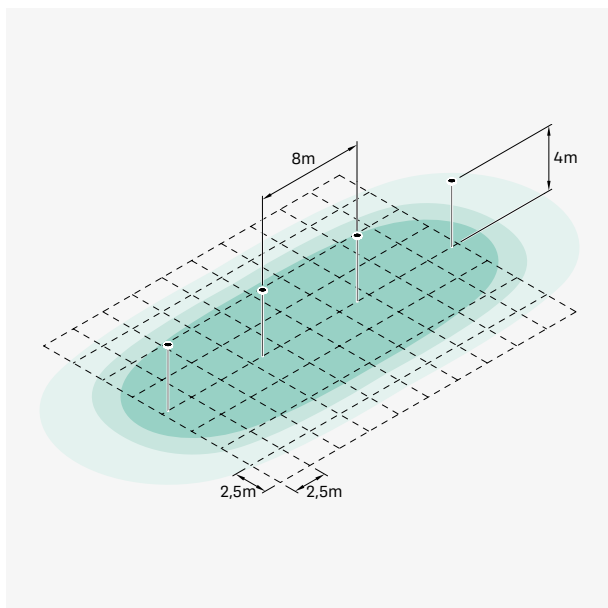

**TIME 360 52W**