

CLIC



➤ Clic Wall

➤ Clic Up Wall

➤ Clic Top

➤ Clic Up Top

➤ Clic Garden

➤ Clic Up Garden

➤ Clic Post

➤ Clic Up Post

➤ Kit Clic Post 40 H1000

➤ Kit Clic Up Post 40 H1000

➤ Kit Clic Post 40 H1500

➤ Kit Clic Up Post 40 H1500

CLIC

Installazione

Installation
Installation
Instalación

Parete - Soffitto

Wall - Ceiling
Mur - Plafond
Pared - Techo

Materiali

Materials
Materiali
Materiales

Materiale Corpo: Policarbonato | Tipo di diffusore: Policarbonato

Material: Polycarbonate | Diffuser type: Polycarbonate
Matériel du corps: Polycarbonate | Type de diffuseur: Polycarbonate
Material del cuerpo: Policarbonato | Tipo de difusor: Policarbonato

Alimentazione

Power supply
Alimentation
Alimentación

AC DIRECT - lampadina GU10 (non inclusa)

AC DIRECT - GU10 light bulb (not included)
AC DIRECT - ampoule GU10 (pas inclus)
AC DIRECT - bombilla GU10 (no incluida)

Versioni

Versions
Versions
Versiones

Taglio di fase

Phase cut
Coupure de phase
Corte de fase



CLIC
WALL



CLIC
UP WALL



CLIC
TOP



CLIC
UP TOP



COLOURS



Black RAL 9005



White RAL 9003



Light Grey RAL 7044



Dark Grey RAL 7021














Green RAL 6003



Terracotta

Clic Wall











IP65 IK 06 1J xx3 CE UK ER	LED			Ⓢ Ⓜ AC DIRECT	COL.	CODE *
	W	LM	REAL LM			LL14802B□
	5	600	362			LL14802W□
					LL14802L□	
					LL14802D□	
					LL14802V□	
					LL14802T□	
	LAMP					
	ATT. MAX	CFL				
	GU10 1x7				LU14802B	
					LU14802W	
					LU14802L	




* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. | GU10 version: light bulb not included. | Version GU10: ampoule non incluse. | Versión GU10: bombilla no incluida.

Clic Up Wall











IP65 IK 06 1J xx3 CE UK ER	LED			Ⓢ Ⓜ AC DIRECT	COL.	CODE *
	W	LM	REAL LM			LL14812B□
	5	600	330			LL14812W□
					LL14812L□	
					LL14812D□	
					LL14812V□	
					LL14812T□	
	LAMP					
	ATT. MAX	CFL				
	GU10 1x7				LU14812B	
					LU14812W	
					LU14812L	



* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. | GU10 version: light bulb not included. | Version GU10: ampoule non incluse. | Versión GU10: bombilla no incluida.











Clic Top

IP65 IK 06 1J xx3 <small>CE UK ER</small>	LED			COL.	CODE *	
	W	LM	REAL LM		LL14801B□	
	5	600	362		LL14801W□	
			⊕ ⊙ AC DIRECT		LL14801L□	
					LL14801D□	
					LL14801V□	
					LL14801T□	
	LAMP					
	ATT. MAX	CFL			LU14801B	
	GU10 1x7	□			LU14801W	
					LU14801L	

* Complete the CODE □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. | GU10 version: light bulb not included. | Version GU10: ampoule non incluse. | Versión GU10: bombilla no incluida.

Clic Up Top

IP65 IK 06 1J xx3 <small>CE UK ER</small>	LED			COL.	CODE *	
	W	LM	REAL LM		LL14811B□	
	5	600	330		LL14811W□	
			⊕ ⊙ AC DIRECT		LL14811L□	
					LL14811D□	
					LL14811V□	
					LL14811T□	
	LAMP					
	ATT. MAX	CFL			LU14811B	
	GU10 1x7	□			LU14811W	
					LU14811L	

* Complete the CODE □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. | GU10 version: light bulb not included. | Version GU10: ampoule non incluse. | Versión GU10: bombilla no incluida.

Accessori | Accessories | Accessoires | Accesorios

Bus DALI

Variatore universale comandabile con segnale DALI. Dimmerazione a Taglio di Fase discendente (a fine fase) IGBT Trailing-Edge.

Bus DALI

Universal dimmer controlled by DALI signal. Descending Phase Cutting dimming (at the end of the phase) IGBT Trailing-Edge.


Bus DALI

Variateur universel commandé par un signal DALI. Phase descendante Gradation par coupure (à la fin de la phase) IGBT Trailing-Edge.

Bus DALI

Dimmer universal controlado por señal DALI. Atenuación por corte de fase descendente (al final de la fase) IGBT Trailing-Edge.

Col. **Code**
 | LB1070110





FEATURES

Diffusore trasparente, diffusore UP opale

Transparent diffuser, opal diffuser (UP version)
 Diffuseur transparent, diffuseur opale (version UP)
 Difusor transparente, difusor opalino (versión UP)




Installazione Clic Wall con e senza base.

Clic Wall installation with and without base.
 Installation Clic Wall avec et sans base.
 Instalación Clic Wall con y sin base.



Rotazione 360°

360° rotation.
 Rotation de 360°.
 Rotación del 360°.

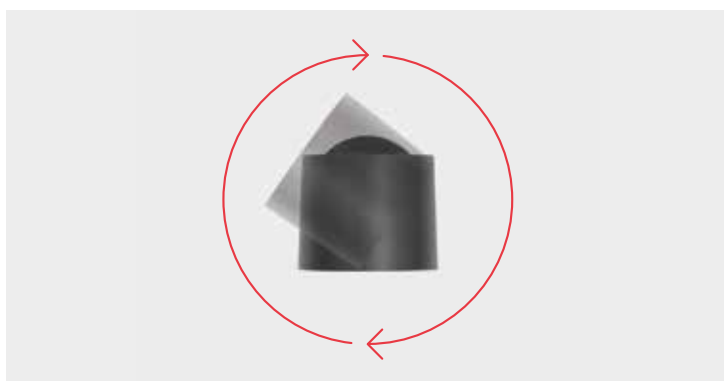

Lampadina GU10 (non inclusa).

GU10 light bulb (not included).
 Ampoule GU10 (pas inclus).
 Bombilla GU10 (no incluida).



LED AC-Direct.



CLIC GARDEN

Installazione

Installation
Installation
Instalación

Terra

Ground
Sol
Suelo

Materiali

Materials
Materiali
Materiales

Materiale Corpo: Policarbonato | Tipo di diffusore: Policarbonato

Material: Polycarbonate | Diffuser type: Polycarbonate
Matériel du corps: Polycarbonate | Type de diffuseur: Polycarbonate
Material del cuerpo: Policarbonato | Tipo de difusor: Policarbonato

Alimentazione

Power supply
Alimentation
Alimentación

AC DIRECT - lampadina GU10 (non inclusa)

AC DIRECT - GU10 light bulb (not included)
AC DIRECT - ampoule GU10 (pas inclus)
AC DIRECT - bombilla GU10 (no incluida)

Versioni

Versions
Versions
Versiones

Taglio di fase

Phase cut
Coupure de phase
Corte de fase



CLIC GARDEN



CLIC UP GARDEN



COLOURS



Black RAL 9005



Dark Grey RAL 7021




Corten



Green RAL 6003

Clic Garden


IP65 IK 06 1J xx3 CE UK ER	LED			W LM REAL LM	COL. CODE *
	5	600	362		
	LAMP				
	ATT. MAX CFL			GU10 1x7	LU14803B <input type="checkbox"/> LU14803K <input type="checkbox"/>

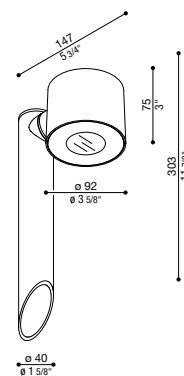

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K
 Versione GU10: lampadina non inclusa. | GU10 version: light bulb not included. | Version GU10: ampoule non incluse. | Versión GU10: bombilla no incluida.

Clic Up Garden

IP65 IK 06 1J xx3 CE UK ER	LED			W LM REAL LM	COL. CODE *
	5	600	330		
	LAMP				
	ATT. MAX CFL			GU10 1x7	LU14813B <input type="checkbox"/> LU14813K <input type="checkbox"/>

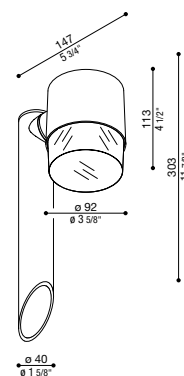

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K
 Versione GU10: lampadina non inclusa. | GU10 version: light bulb not included. | Version GU10: ampoule non incluse. | Versión GU10: bombilla no incluida.

Accessori | Accessories | Accessoires | Accesorios

Bus DALI


Variatore universale comandabile con segnale DALI. Dimmerazione a Taglio di Fase discendente (a fine fase) IGBT Trailing-Edge.

Bus DALI
 Universal dimmer controlled by DALI signal. Descending Phase Cutting dimming (at the end of the phase) IGBT Trailing-Edge.

Bus DALI
 Variateur universel commandé par un signal DALI. Phase descendante Gradation par coupure (à la fin de la phase) IGBT Trailing-Edge.

Bus DALI
 Dimmer universal controlado por señal DALI. Atenuación por corte de fase descendente (al final de la fase) IGBT Trailing-Edge.

Col. Code
 | LB1070110





CLIC GARDEN



CLIC GARDEN



CLIC POST

Installazione

Installation
Installation
Instalación

Palo Ø40 - Palo Ø60

Post Ø40 - Post Ø60
Poteau Ø40 - Poteau Ø60
Poste Ø40 - Poste Ø60

Materiali

Materials
Materiali
Materiales

Materiale Corpo: Policarbonato | Tipo di diffusore: Policarbonato

Material: Polycarbonate | Diffuser type: Polycarbonate
Matériel du corps: Polycarbonate | Type de diffuseur: Polycarbonate
Material del cuerpo: Policarbonato | Tipo de difusor: Policarbonato

Alimentazione

Power supply
Alimentation
Alimentación

AC DIRECT - lampadina GU10 (non inclusa)

AC DIRECT - GU10 light bulb (not included)
AC DIRECT - ampoule GU10 (pas inclus)
AC DIRECT - bombilla GU10 (no incluida)

Versioni

Versions
Versions
Versiones

Taglio di fase

Phase cut
Coupure de phase
Corte de fase



CLIC POST



CLIC UP POST



COLOURS



Black RAL 9005



Dark Grey RAL 7021



Corten



Green RAL 6003

Clic Post

IP65 IK 06 1J xx3 CE UK CR	LED			Ⓧ Ⓞ AC DIRECT	COL.	CODE *		
	W	LM	REAL LM		LL14804B□ LL14804D□ LL14804K□			
	5	600	362					
	LAMP							
	ATT. MAX	CFL						
	GU10 1x7	□						
				LU14804B LU14804K				

* Complete the CODE □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Fornito con adattatori per pali Ø60 e Ø40. Versione GU10: lampadina non inclusa. | Supplied with adaptors for Ø60 and Ø40 poles. GU10 version: light bulb not included. | Fourni avec des adaptateurs pour les poteaux de Ø60 et Ø40. Version GU10: ampoule non incluse. | Adaptadores para postes de Ø60 y Ø40 incluidos. Versión GU10: bombilla no incluida.

Clic Up Post

IP65 IK 06 1J xx3 CE UK CR	LED			Ⓧ Ⓞ AC DIRECT	COL.	CODE *		
	W	LM	REAL LM		LL14814B□ LL14814D□ LL14814K□			
	5	600	330					
	LAMP							
	ATT. MAX	CFL						
	GU10 1x7	□						
				LU14814B LU14814K				

* Complete the CODE □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Fornito con adattatori per pali Ø60 e Ø40. Versione GU10: lampadina non inclusa. | Supplied with adaptors for Ø60 and Ø40 poles. GU10 version: light bulb not included. | Fourni avec des adaptateurs pour les poteaux de Ø60 et Ø40. Version GU10: ampoule non incluse. | Adaptadores para postes de Ø60 y Ø40 incluidos. Versión GU10: bombilla no incluida.

Accessori | Accessories | Accessoires | Accesorios

Forty

Palo diametro 40 mm con tappo di chiusura incluso. Staffa di fissaggio esclusa.


Forty
40mm Bayblend pole supplied with top cap. Ground fixing base not included.

Forty
Poteau de 40 mm en Bayblend fourni avec un couvercle supérieur. Base de fixation au sol pas inclus.

Forty
Poste Bayblend de 40 mm provisto de tapa superior. Base de fijación al suelo no incluida.

Forty H 1000	
Col.	Code
	LB148001B
	LB148001D
	LB148001K

Forty H 1500	
Col.	Code
	LB148002B
	LB148002D
	LB148002K

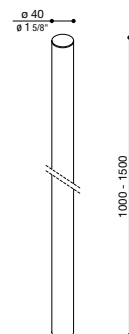

Still

Palo diametro 60 mm in Bayblend senza basamento. Possibilità di installazione con o senza basamento. Anima interna palo in acciaio zincato per altezze da 2000 mm. I pali di altezza uguale e superiore a 2000 mm devono essere interrati di almeno 500 mm.

Still

60 mm Bayblend pole without base. Possibility of installation with or without base. Galvanized steel inner pole from H 2000 mm. 2000 mm and higher poles must be underground by at least 500 mm.



Still

Poteau de 60 mm en Bayblend sans socle. Possibilité d'installation avec ou sans socle. Noyau interne en acier galvanisé pour poteau à partir de h. 2000 mm. Les poteaux d'une hauteur de 2000 mm et plus doivent être enterrés à au moins 500 mm de profondeur.



Still

Poste de 60 mm en Bayblend sin base. Posibilidad de instalación con o sin base. Núcleo interno en acero galvanizado para alturas de 2000 mm. Los postes con una altura de 2.000 mm o superior deben estar enterrados a una profundidad mínima de 500 mm.



Still H 160 mm

Col.	Code
	LB11033
	LB1103K



Still H 500 mm

Col.	Code
	LB11112
	LB1111K



Still H 1000 mm

Col.	Code
	LB1100012
	LB110001K



Still H 1500 mm

Col.	Code
	LB1100022
	LB110002K



Still H 2000 mm

Col.	Code
	LB1100032
	LB110003K



Still H 2500 mm


Col.	Code
	LB1100042
	LB110004K

Still H 3000 mm

Col.	Code
	LB1100052
	LB110005K

Still H 3500 mm


Col.	Code
	LB1100062
	LB110006K



Staffa Palo Forty

Forty Post fixing base

Base for fixing the Forty Post above ground


Col.	Code
	LB1480001

Base de fixation de poteau Forty

Base pour fixer le poteau Forty au-dessus du sol.

Base de fijación del Poste Forty

Base para fijar el Poste Forty sobre el suelo.



Tappo Palo Still

Tappo in polietilene.

Cap for Post Still

Polyethylene cap.

Couvercle Poteau Still


Couvercle en polyéthylène.

Tapón Palo Still

Tapón de polietileno

Col. Code

	LB1100082
	LB110008K



Bus DALI

Varialuce universale comandabile con segnale DALI. Dimmerazione a Taglio di Fase discendente (a fine fase) IGBT Trailing-Edge.


Universal dimmer controlled by DALI signal. Descending Phase Cutting dimming (at the end of the phase) IGBT Trailing-Edge.

Variateur universel commandé par un signal DALI. Phase descendante Gradation par coupure (à la fin de la phase) IGBT Trailing-Edge.

Dimmer universal controlado por señal DALI. Atenuación por corte de fase descendente (al final de la fase) IGBT Trailing-Edge.

Col. Code

LB1070110





KIT CLIC

Installazione

Installation
Installation
Instalación

Terra

Ground
Sol
Suelo

Materiali

Materials
Materiali
Materiales

Materiale Corpo: Policarbonato | Tipo di diffusore: Policarbonato

Material: Polycarbonate | Diffuser type: Polycarbonate
Matériel du corps: Polycarbonate | Type de diffuseur: Polycarbonate
Material del cuerpo: Policarbonato | Tipo de difusor: Policarbonato

Alimentazione

Power supply
Alimentation
Alimentación

AC DIRECT - lampadina GU10 (non inclusa)

AC DIRECT - GU10 light bulb (not included)
AC DIRECT - ampoule GU10 (pas inclus)
AC DIRECT - bombilla GU10 (no incluida)

Versioni

Versions
Versions
Versiones

Taglio di fase

Phase cut
Coupure de phase
Corte de fase



KIT CLIC
POST 40 H1000



KIT CLIC
UP POST 40 H1000



KIT CLIC
POST 40 H1500



KIT CLIC
UP POST 40 H1500



COLOURS



Black RAL 9005



Dark Grey RAL 7021



Corten

Kit Clic Post 40 H1000

IP65 IK 06 1J xx3 CE UK ER	LED			COL. CODE *	
	W	LM	REAL LM		
	5	600	362		
	LAMP				
ATT. MAX	CFL		COL. CODE *		
GU10 1x7			LU14805B LU14805K		

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. Kit composto da Clic Post, Palo Forty con tappo di chiusura e Staffa Palo Forty. | GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base. | Version GU10: ampoule non incluse. Kit composé de Clic Post, poteau Forty avec couvercle supérieur et Base de fixation de poteau Forty. | Versión GU10: bombilla no incluida. Kit compuesto por Clic Post, Forty poste con tapa superior y Base de fijación del Poste Forty.

Kit Clic Up Post 40 H1000

IP65 IK 06 1J xx3 CE UK ER	LED			COL. CODE *	
	W	LM	REAL LM		
	5	600	330		
	LAMP				
ATT. MAX	CFL		COL. CODE *		
GU10 1x7			LU14815B LU14815K		

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. Kit composto da Clic Up Post, Palo Forty con tappo di chiusura e Staffa Palo Forty. | GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base. | Version GU10: ampoule non incluse. Kit composé de Clic Post, poteau Forty avec couvercle supérieur et Base de fixation de poteau Forty. | Versión GU10: bombilla no incluida. Kit compuesto por Clic Post, Forty poste con tapa superior y Base de fijación del Poste Forty.









Kit Clic Post 40 H1500


IP65 IK 06 1J xx3 CE UK ER	LED			COL. CODE *	
	W	LM	REAL LM		
	5	600	362		
	LAMP				
ATT. MAX	CFL		COL. CODE *		
GU10 1x7			LU14806B LU14806K		

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. Kit composto da Clic Post, Palo Forty con tappo di chiusura e Staffa Palo Forty. | GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base. | Version GU10: ampoule non incluse. Kit composé de Clic Post, poteau Forty avec couvercle supérieur et Base de fixation de poteau Forty. | Versión GU10: bombilla no incluida. Kit compuesto por Clic Post, Forty poste con tapa superior y Base de fijación del Poste Forty.

Kit Clic Up Post 40 H1500

IP65 IK 06 1J xx3 CE UK ER	LED			COL. CODE *  LL14816B □  LL14816D □  LL14816K □
	W	LM	REAL LM	
	5	600	330	
	  AC DIRECT			
LAMP				
ATT. MAX		CFL		 LU14816B  LU14816K
GU10 1x7				

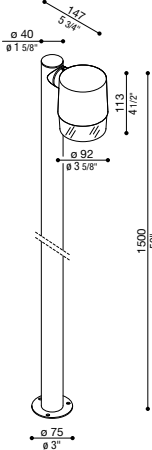

* Complete the CODE □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. Kit composto da Clic Up Post, Palo Forty con tappo di chiusura e Staffa Palo Forty. | GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base. | Version GU10: ampoule non incluse. Kit composé de Clic Post, poteau Forty avec couvercle supérieur et Base de fixation de poteau Forty. | Versión GU10: bombilla no incluida. Kit compuesto por Clic Post, Forty poste con tapa superior y Base de fijación del Poste Forty.

Accessori | Accessories | Accessoires | Accesorios

Forty

Palo diametro 40 mm con tappo di chiusura incluso.
Staffa di fissaggio esclusa.

Forty

40mm Bayblend pole supplied with top cap. Ground fixing base not included.




Forty

Poteau de 40 mm en Bayblend fourni avec un couvercle supérieur. Base de fixation au sol pas inclus.




Forty


Poste Bayblend de 40 mm provisto de tapa superior. Base de fijación al suelo no incluida.

Forty H 1000

Col.	Code
	LB148001B
	LB148001D
	LB148001K

Forty H 1500

Col.	Code
	LB148002B
	LB148002D
	LB148002K

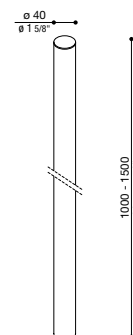

Bus DALI

Varialuce universale comandabile con segnale DALI. Dimmerazione a Taglio di Fase discendente (a fine fase) IGBT Trailing-Edge.

Bus DALI

Universal dimmer controlled by DALI signal. Descending Phase Cutting dimming (at the end of the phase) IGBT Trailing-Edge.


Bus DALI

Variateur universel commandé par un signal DALI. Phase descendante Gradation par coupure (à la fin de la phase) IGBT Trailing-Edge.

Bus DALI

Dimmer universal controlado por señal DALI. Atenuación por corte de fase descendente (al final de la fase) IGBT Trailing-Edge.

Col.	Code
	LB1070110



Staffa Palo Forty

Forty Post fixing base

Base for fixing the Forty Post above ground


Col.	Code
	LB1480001

Base de fixation de poteau Forty

Base pour fixer le poteau Forty au-dessus du sol.

Base de fijación del Poste Forty

Base para fijar el Poste Forty sobre el suelo.





 KIT CLIC POST 40 H1000



