




### Technical information:

|   |               |
|---|---------------|
| Brand                                     | MEANWELL      |
| Reference number                          | LPV-35-12     |
| IP  | 67            |
| Power output                              | 36W           |
| Nominal DC output voltage<br>(under load) | 12V           |
| Nominal output current                    | 3A            |
| Input voltage range                       | 90-264V       |
| Frequency                                 | 47/63Hz       |
| Power factor ( $\lambda$ )                | 0,5           |
| Circuit breaker<br>B10 - C10 - B16 - C16  | 2 - 4 - 4 - 7 |
| Specifications                            | On-Off        |

### Dimension

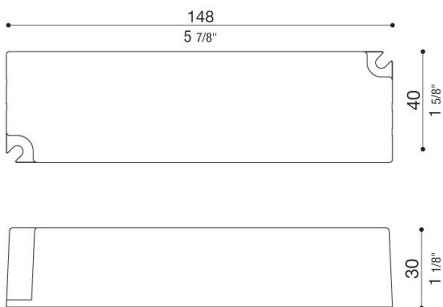

### LED Controlgear Constant Tension

Parallel connection



### Warning!!!

Before connecting the ballast to the mains, ensure that the LEDs on the secondary are connected. Otherwise the lamp may not switch on.

